




*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

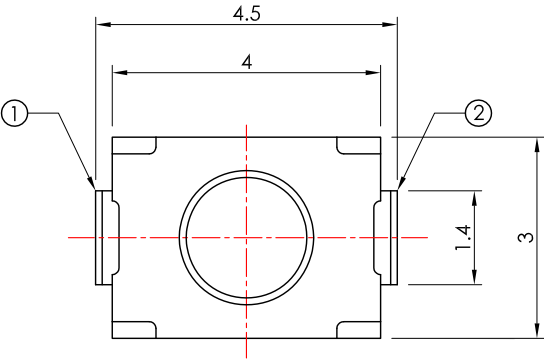

P.C.B. LAYOUT


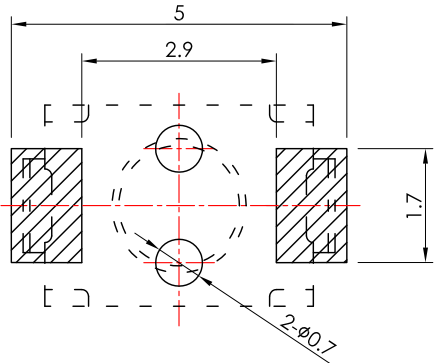


CIRCUIT DIAGRAM



SPECIFICATION

Rating: 50mA 12V DC.
Travel: 0.15±0.1mm.
Contact resistance: 100mΩ Max.
Operating force: 250±50g.
Life: 100,000 Cycles.
Soldering temperature: 250°C Max. for 3 sec.
Soldering time: 1 time only.
Note1: Unwashable, don't be immersed by epoxy and organic solvent.
Note2: Please check the actual size, do not scale the drawing page.

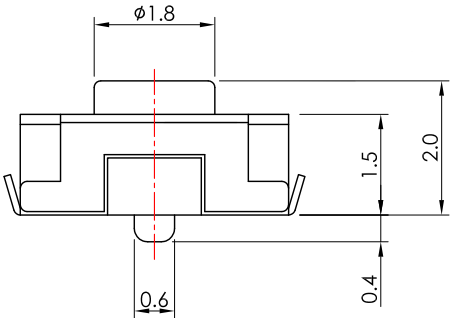

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW23-V20JP1-250-LF
SERIES POST
180°SMT J FOOT
HIGH 2.0mm
LEADFREE
250g

DESCRIPTION: