


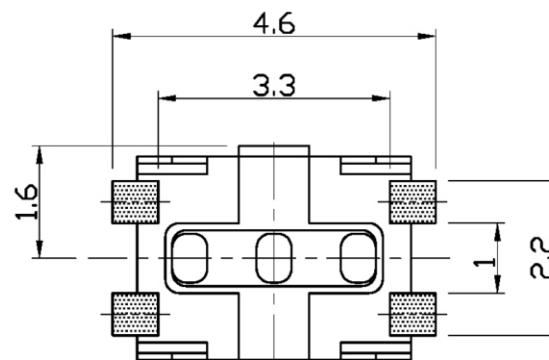

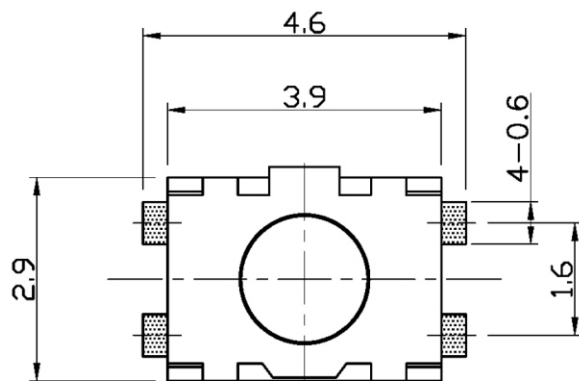


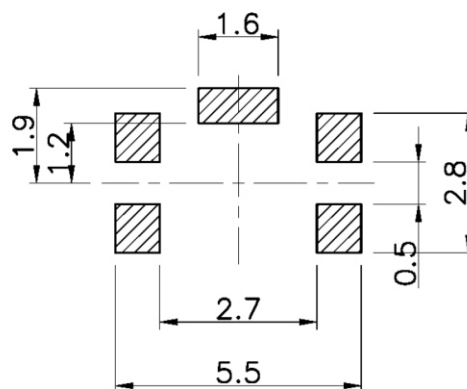

SMD REFLOW PATTERN (ALL TOLERANCE : ± 0.05)

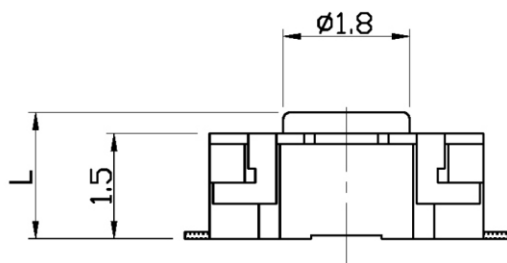

CIRCUIT DIAGRAM



SPECIFICATION

1. RATING : 50mA, DC12V Max.
2. CIRCUIT : 1C-1P.
3. OPERATING FORCE : 100,160 $\pm$ 30gf or 220 $\pm$ 50gf
4. CONTACT RESISTANCE : 100m Ω Max.
5. TRAVEL : 0.2 $\pm$ 0.1mm.
6. LIFE : 100,000 Cycles Min
7. TOLERANCE : ± 0.2 .

MODEL NO	L (mm)
TSW23-V18E-xxx	1.8
TSW23-V20E-xxx	2
TSW23-V25E-xxx	2.5
TSW23-V70E-xxx	7

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

TSW23-VxxE-xxx-LF
SERIES | LEADFREE
180°SMT | 100:100g
20:2.0mm | 160:160g
25:2.5mm | 220:220g
70:7.0mm | EAR

DESCRIPTION: