



SMD REFLOW PATTERN

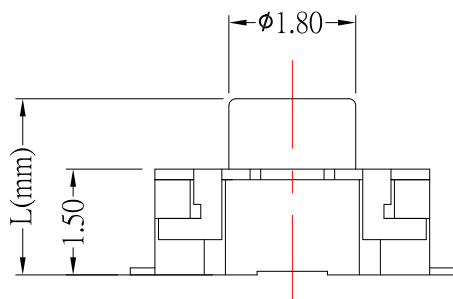

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA Max.
Circuit	1C - 1P
Contact Resistance	100mΩ Max.
Travel	0.15 ± 0.1mm
Operating Force	0   100 ± 30gf   1   130 ± 30gf   2   160 ± 50gf   3   250 ± 50gf
Operating Life (cycles)	100,000

MODEL NO.	L (mm)
TSW24-V18E-xxx	1.8
TSW24-V20E-xxx	2.0
TSW24-V25E-xxx	2.5

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
F	DUST COVER	1	PI FILM	
E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	
A	STEM	1	LCP	

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

照片框

ORDER INFORMATION

TSW24-VxxE-xxx-LF

SERIES 180°SMT LEADFREE  
100:100g  
130:130g  
160:160g  
250:250g  
18:HIGH 1.8mm  
20:HIGH 2.0mm  
25:HIGH 2.5mm EAR

DESCRIPTION: TACT SWITCH