
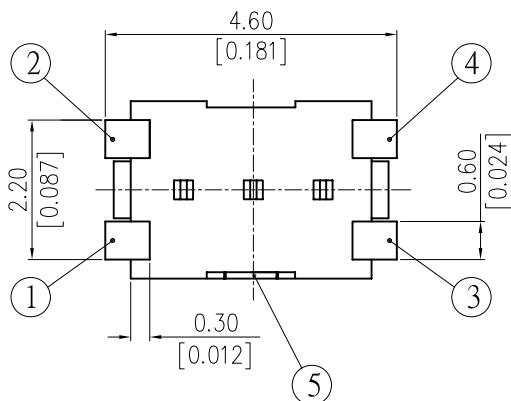

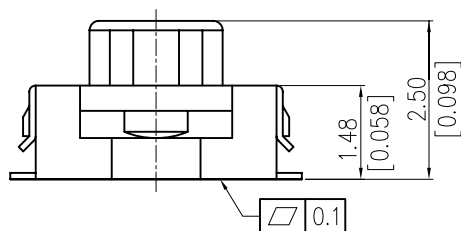
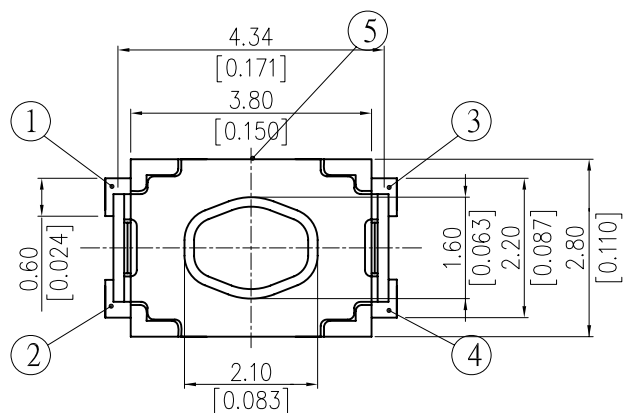


CIRCUIT DIAGRAM

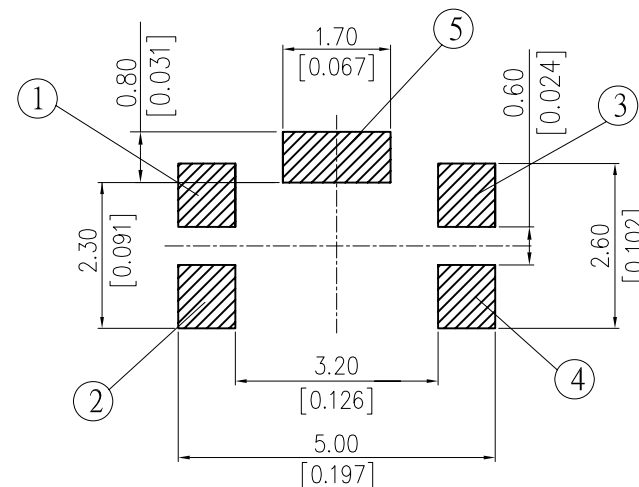

P.C.B. LAYOUT

Note:

1. All dimensions are in millimeters, bracketed dimension are in inches.
2. Genreal tolerances Max: $\pm 0.2\text{mm}$ [± 0.008]
3. Operation Force: $160 \pm 50\text{gf}$ Vertical push
4. Stroke: $0.13 \pm 0.10\text{mm}$ Vertical push
5. Electrical Life: 100,000 Cycles min
6. Rating: 50mA, 12VDC

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TSW34-V25E2-160-LF

SERIES

EAR

HIGH 2.5mm

180°SMT

LEADFREE

160g

DESCRIPTION: TINY VERTICAL PUSE SWITCH(4.6X2.8) MECHANICAL CONTACT TYPE