



1. 功能规格			
1.1 额定电压	DC12V	1.6 自由位置 (FP)	2.5 ± 0.2mm
1.2 额定电流	50 mA	1.7 动作位置 (OP)	
1.3 接触电阻 (CR)	≤ 100mΩ (初始值)	1.8 行程 (PT)	0.2 ± 0.2mm
1.4 操作力 (OF)	160 ± 50gf	1.9 灵敏度 (BT)	
1.5 回弹力 (RF)		1.10	
2. 可靠度参数			
2.1 机械寿命	300,000 cycles	2.5 焊接工艺	手工焊, 回流焊
2.2 电气寿命	30,000 cycles	2.6 适用温度	-25°C - +70°C
2.3 绝缘电阻	≥ 100MΩ DC250V	2.7 适用湿度	< 85%RH
2.4 耐压强度	AC250V 1 minute	2.8	

3. 尺寸规格图

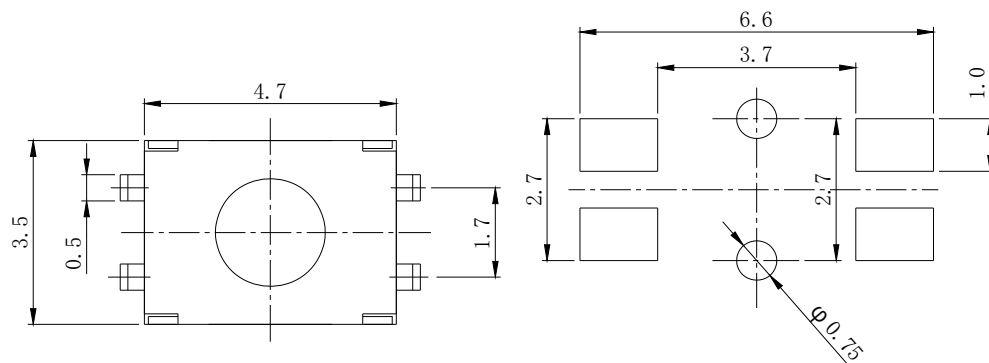

P. C. B PATTERN DIMENSION

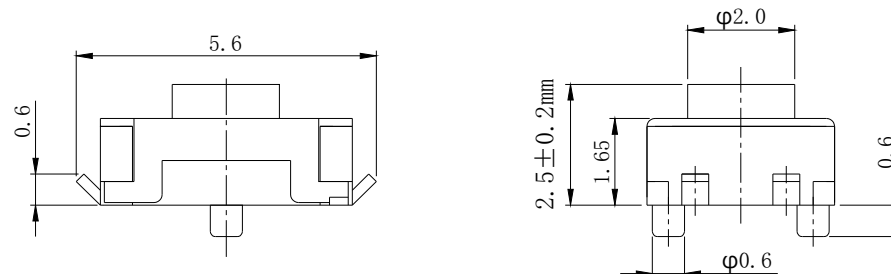

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

TSW34-V25J2P-160-LF

SERIES | POST | LEADFREE  
160g  
J FOOT  
HIGH 2.5mm  
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: