

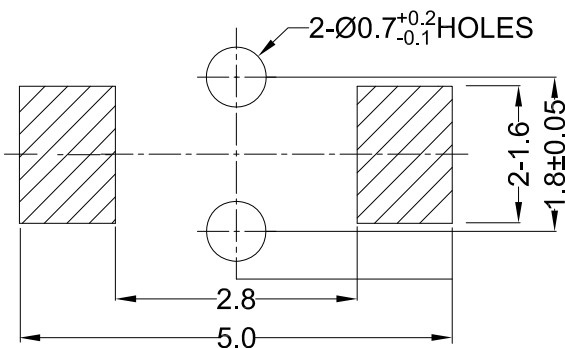
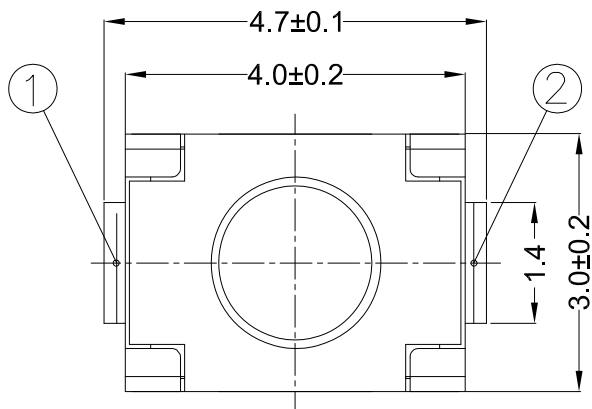


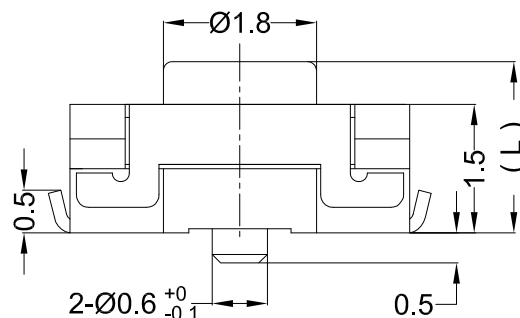


P.C.B LAND PATTERN



BTS-SS302U: With Embossing

L(mm):
2.0±0.15mm
2.5±0.15mm



CIRCUIT DIGRAM

SPECIFICATION:

- 1.Rating:DC 12V 50mA
- 2.Travel:0.2 ±0.1mm
- 3.Contact Resistance:100mΩ Max
- 4.Bounce:10m Sec Max
- 5.Life Cycle:50,000 Cycle Min

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

less than 10 ±0.1
10~30 ±0.2
30~100 ±0.3
Angle ±2°

PPOJECTION

照片框

ORDER INFORMATION

TSW34-VxxJ1P2-xxx-LF
SERIES
180°SMT
20:HIGH 2.0mm
25:HIGH 2.5mm
LEADFREE
160:160g
250:250g
POST
J FOOT

DESCRIPTION: TACT SWITCH