

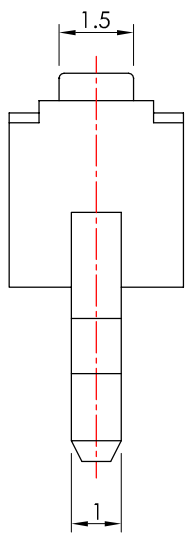


**SPECIFICATION**


- Rating:** 50mA 12V DC.
- Travel:** 0.25±0.1mm.
- Contact resistance:** 100mΩ Max. (initial)
- Operating force:** 160±50g.
- Minimum load:** 10mA 3.3V DC. (reference only)
- Operating life:** 50,000 Cycles (130 ~ 160g).
- Soldering temperature:** 250°C Max for 3 Sec.
- Soldering time:** 1 time only.
- Note:** Not washable, don't immerse into epoxy and organic solvent.

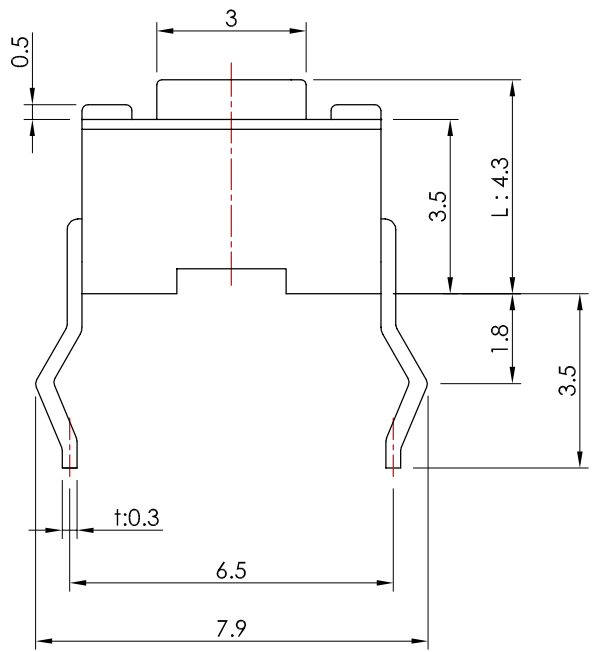

P.C.B MOUNTING  
PATTERN DIMENSION



CIRCUIT DIAGRAM



TSW36-D43-xxx-LF  
LEADFREE

130:130g  
160:160g  
250:250g

RoHS Compliant

	PART NO. TSW36-D43-xxx		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: <b>Tact Switch</b>				
	DWG NO. TSW36-D43-xxx						CHECKED BY CY	
焯倫股份有限公司	FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE
	UNIT / mm	SCALE 1:1	PROJECTION					