

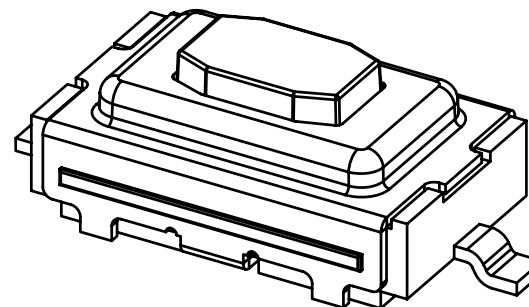
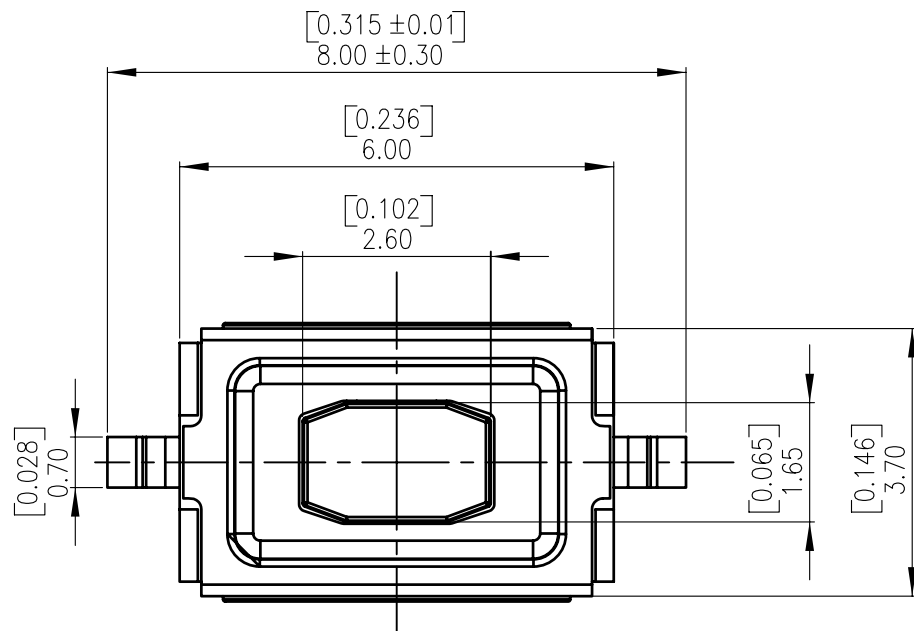



CIRCUIT DIAGRAM

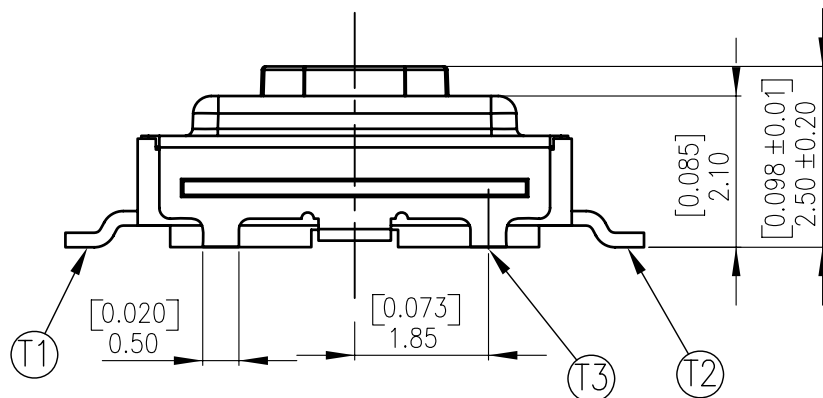

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS,
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX. ±0.2mm.

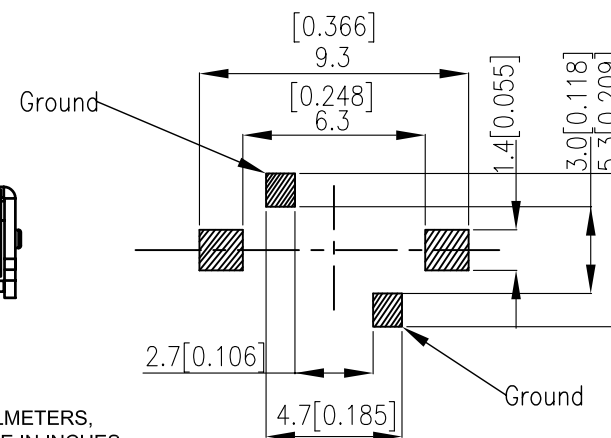

P C B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW36-V25E2R-xxx-LF

SERIES

LEADFREE

160:160g/BROWN

260:260g/RED



REEL

GROUND x2


HIGH 2.5mm

180°SMT

DESCRIPTION: TACT SWITCH (THINNER TYPE)

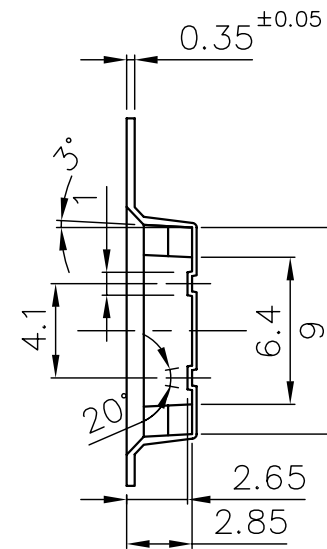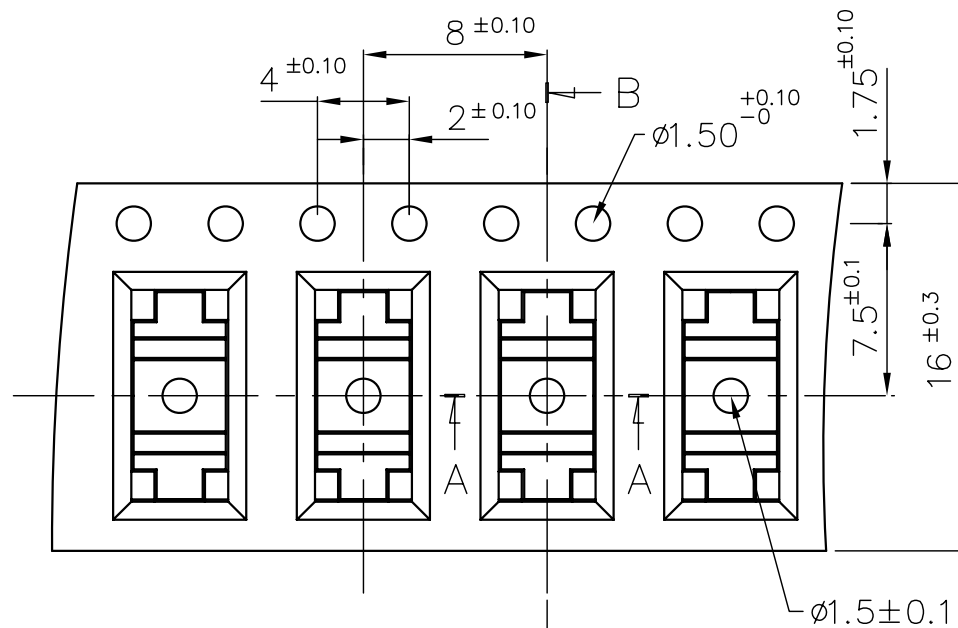

B-B Section



A-A Section

Note:
1. General Tolerance: ± 0.10 .

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TSW36-V25E2R-xxx-LF

SERIES

180°SMT

REEL

GROUND x2

HIGH 2.5mm

LEADFREE

160:160g/BROWN

260:260g/RED

DESCRIPTION: TACT SWITCH (THINNER TYPE)

