
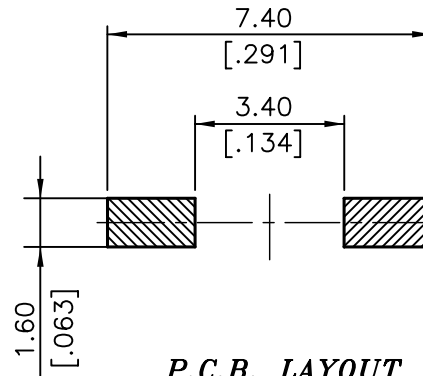




NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX. $\pm 0.20\text{mm}$.

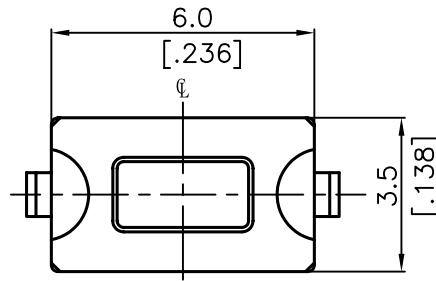

P.C.B. LAYOUT

CIRCUIT DIAGRAM

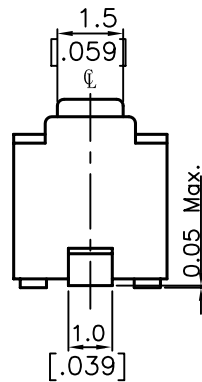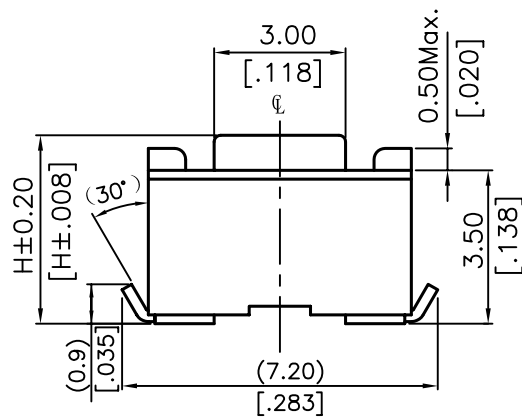

TSW36-V50J	5.0 [.197]	Y	YELLOW 520g
		S	SALMON 320g
		R	RED 260g
		N	BROWN 160g
TSW36-V43J	4.3 [.169]	Y	YELLOW 520g
		S	SALMON 320g
		R	RED 260g
		N	BROWN 160g
PROD. NO.	H	COLOR FOR OPERATING RORCE	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TSW36-VxxJR-xxx-LF

SERIES

180°SMT

43:HIGH 4.3mm

50:HIGH 5.0mm

LEADFREE

160:160g



260:260g

320:320g

520:520g

REEL
J FOOT

DESCRIPTION: TACTILE SWITCH (3.5x6) (S.M.T TYPE)

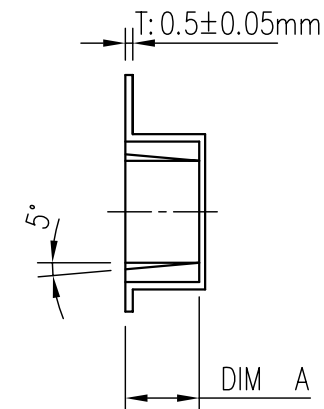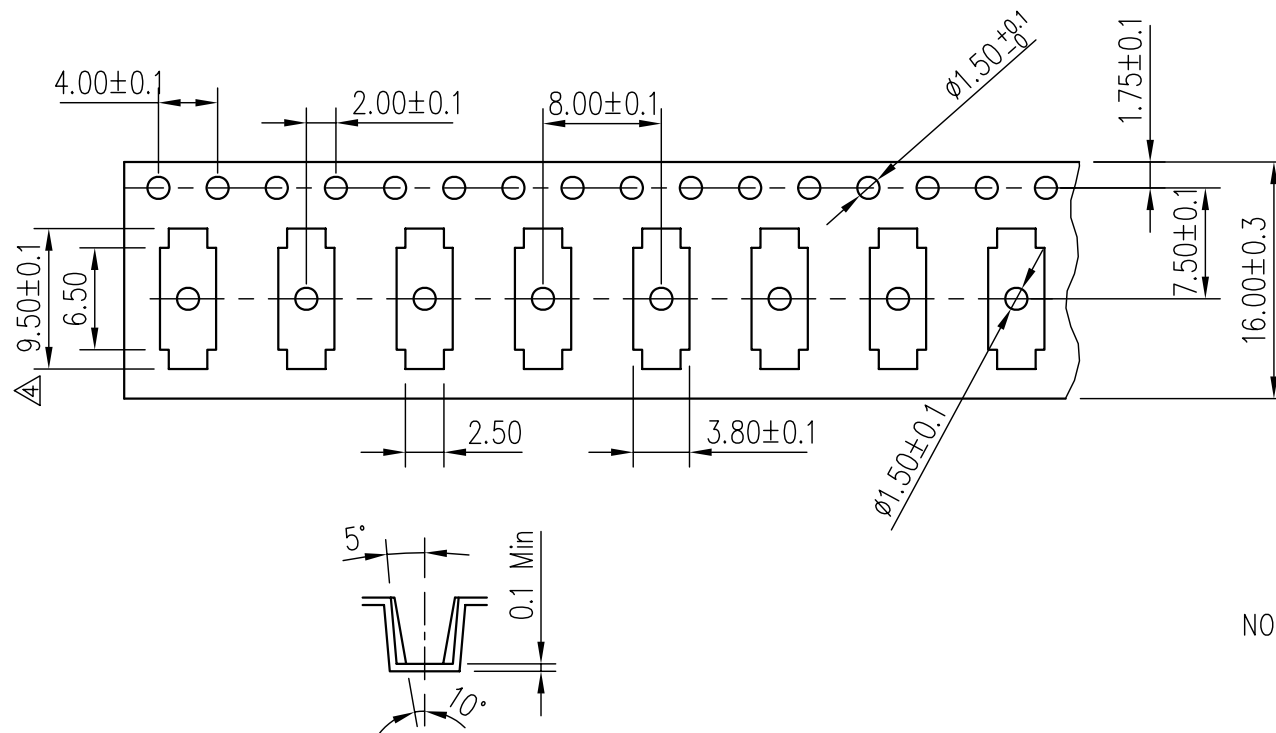

NOTE:

1. Pitch Tolerance over any 10 Pitch $\pm 0.2\text{mm}$.
2. General Tolerances Max: 0.1mm.

CARRIER TAPE

COVER TAPE

5.2±0.1	13mm
4.5±0.1	
DIM A	膠帶寬

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TSW36-VxxJR-xxx-LF

SERIES 180°SMT
43:HIGH 4.3mm
50:HIGH 5.0mm
LEADFREE
160:160g
260:260g
320:320g
520:520g
REEL
FOOT

DESCRIPTION: TACTILE SWITCH (3.5x6) (S.M.T TYPE)