

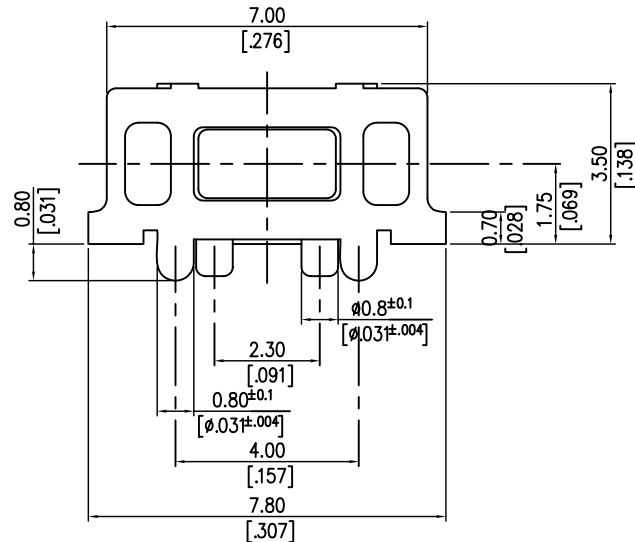


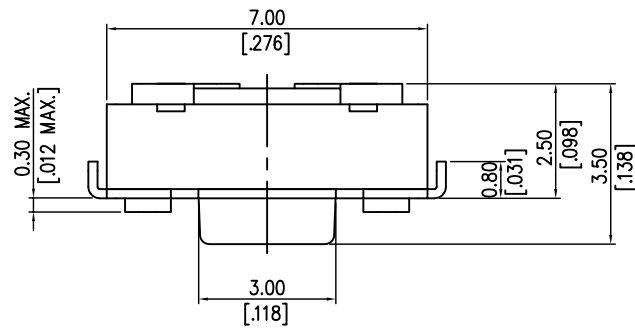


PART NO.	COLOR OF STEM	OPERATING FORCE
TSW37-WMP-160	BLACK	160±50gf
TSW37-WMP-260	WHITE	260±50gf

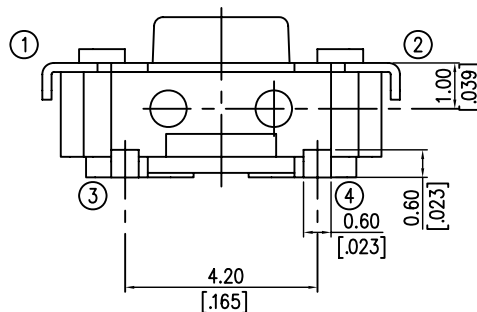

P.C.B. LAYOUT

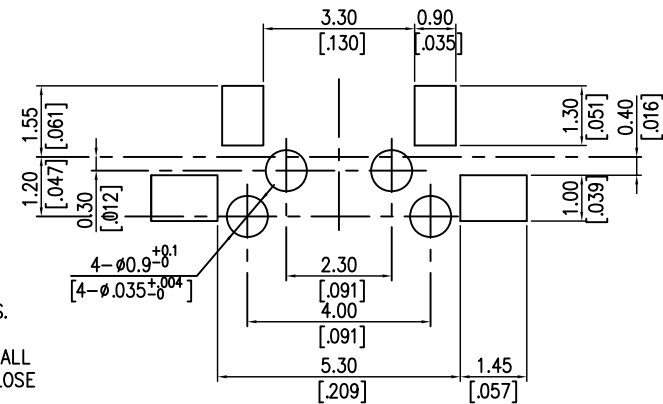

NOTE:
 1. ALL DIMENSIONS ARE IN MILLIMETERS.
 BRACKETED DIMENSIONS ARE IN INCHES.
 2. GENERAL TOLERANCES ±0.3mm
 3. WHEN SWITCH PLACED ON THE P.C.B. ALL
 THE TERMINALS SHOULD BE STAYED CLOSE
 TO P.C.B. 0.08mm MAX. DECLIVITY IS
 ALLOWABLE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW37-WMP-xxx-LF

SERIES

LEADFREE

160:160g

260:160g

POST

METAL FOOT

90°SMT

DESCRIPTION: