


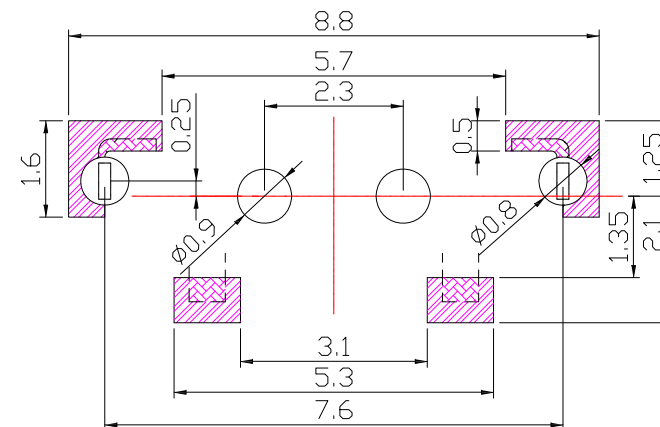


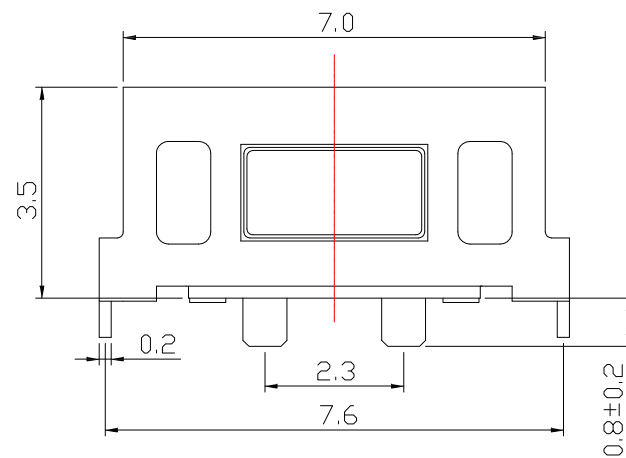

CIRCUIT DIAGRAM

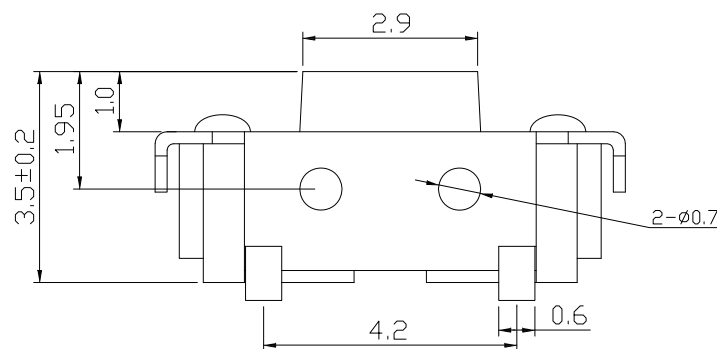

PCB LAYOUT

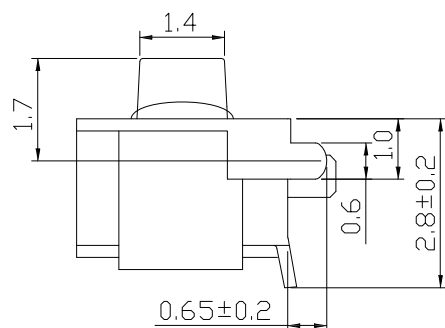

SPECIFICATIONS

Rating	DC 12V 50mA.			
Insulation Resistance	50 M Ω Min.			
Contact Resistance	100 m Ω Max.			
Operating Force	2	160 $\pm$ 50gf	3	250 $\pm$ 50gf
Operating Life (cycles)		100,000		80,000

E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	COPPER ALLOY	
B	BASE	1	LCP	White
A	STEM	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

照片框

ORDER INFORMATION

TSW37-WMP7623-xxx-LF

SERIES

90°SMT

POST

LEADFREE

160:160g

260:160g

7.6+2.3mm

METAL FOOT

DESCRIPTION: SWITCH