


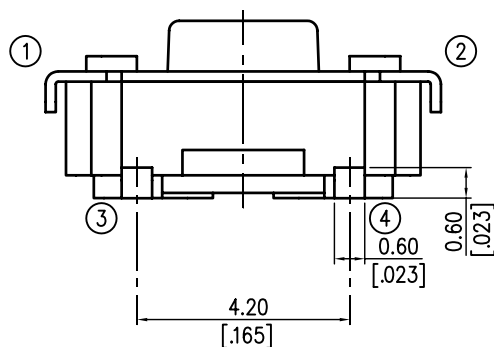
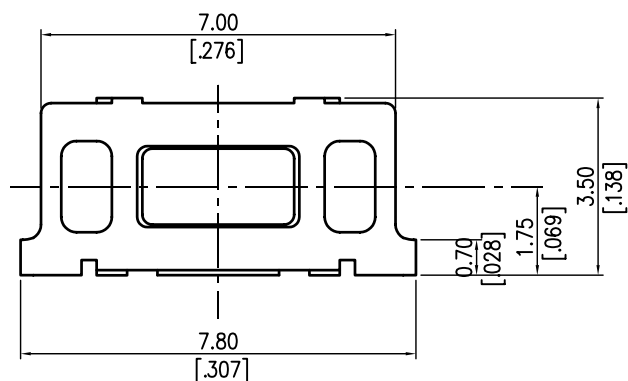
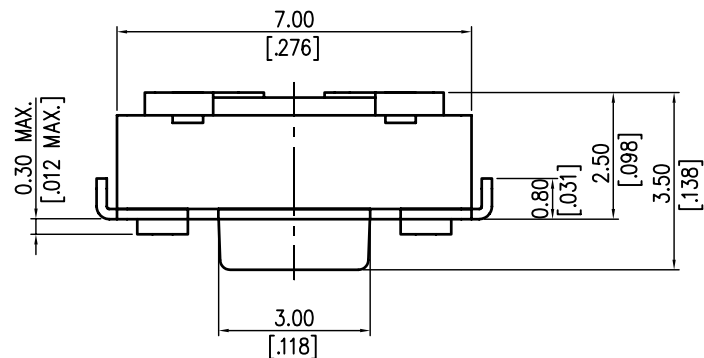





CIRCUIT



PART NO.	COLOR OF STEM	OPERATING FORCE
TSW37-WX-160	BLACK	160±50gf
TSW37-WX-260	WHITE	260±50gf



P.C.B. LAYOUT

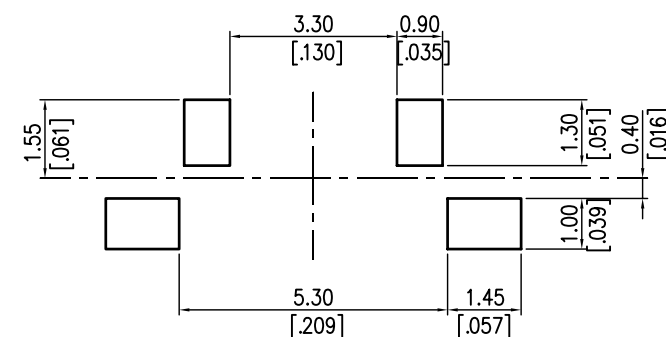

NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS. BRACKETED DIMENSIONS ARE IN INCHES.
- 2.GENERAL TOLERANCES $\pm 0.3\text{mm}$
- 3.WHEN SWITCH PLACED ON THE P.C.B. ALL THE TERMINALS SHOULD BE STAYED CLOSE TO P.C.B. 0.08mm MAX. DECLIVITY IS ALLOWABLE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TSW37-WX-xxx-LF

SERIES

LEADFREE

160:160g

260:160g

NON POST

90°SMT

DESCRIPTION: TACT SWITCH