

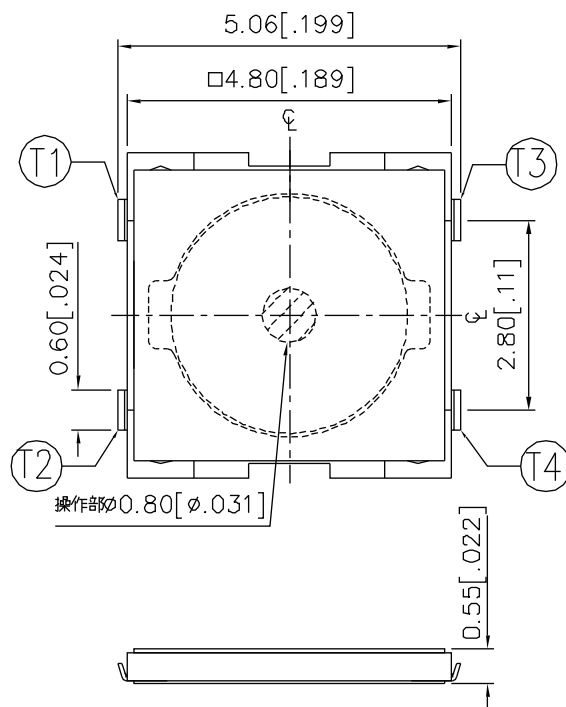




SPECIFICATIONS:

1. Rating : 50mA, DC12V
2. Contact Resistance : 100m Ω Max
3. Insulation Resistance : DC 100V 1M $\pm$ 5s 100m Ω min
4. Dielectric Strength : AC 100V 1M $\pm$ 5s
5. Operating Force(OF): 100 $\pm$ 50gf、160 $\pm$ 50gf、200 $\pm$ 50gf
260 $\pm$ 50gf、360 $\pm$ 60gf
6. Life: 100 $\pm$ 50gf, 160 $\pm$ 50gf, 1000,000 CYCLES
200 $\pm$ 50gf, 260 $\pm$ 50gf, 500,000 CYCLES
360 $\pm$ 60gf, 200,000 CYCLES

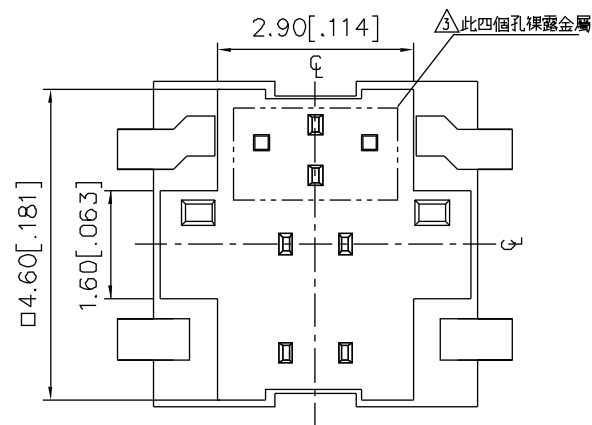


CIRCUIT DIAGRAM

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETER, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES $\pm$ 0.20mm [.008].

Table 1

PART NO	OF
TSW44-V05-100	100gf
TSW44-V05-160	160gf
TSW44-V05-200	200gf
TSW44-V05-260	260gf
TSW44-V05-360	360gf

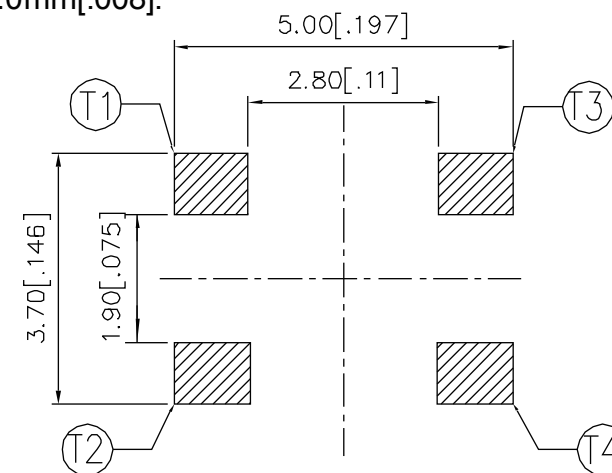

P.C.B. LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

TSW44-V05-xxx-LF

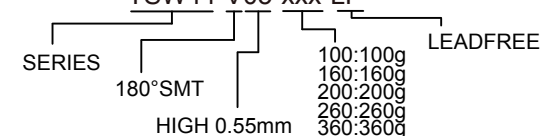

DESCRIPTION: