

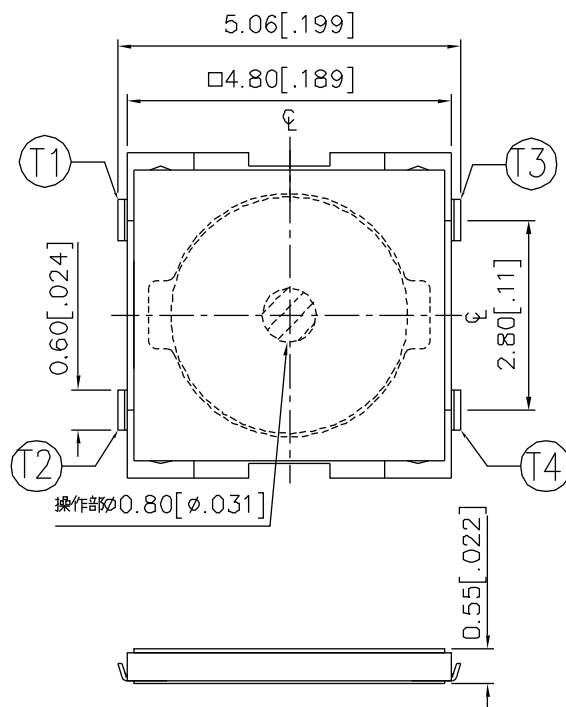




SPECIFICATIONS:

- Rating :50mA, DC12V
- Contact Resistance :100m Ω Max
- Insulation Resistance :DC 100V 1M $\pm$ 5s 100m Ω min
- Dielectric Strength :AC 100V 1M $\pm$ 5s
- Operating Force(OF):100 $\pm$ 50gf、160 $\pm$ 50gf、200 $\pm$ 50gf
260 $\pm$ 50gf、360 $\pm$ 60gf
- Life: 100 $\pm$ 50gf,160 $\pm$ 50gf,1000,000 CYCLES
200 $\pm$ 50gf,260 $\pm$ 50gf,500,000 CYCLES
360 $\pm$ 60gf,200,000 CYCLES

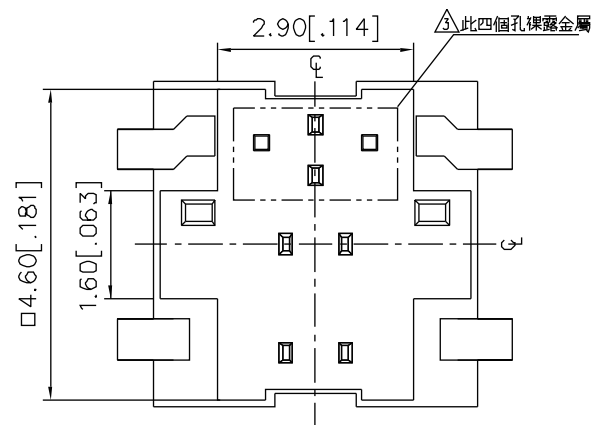


CIRCUIT DIAGRAM

NOTE:

- ALL DIMENSIONS ARE IN MILLIMETER,BRACKETED DIMENSIONS ARE IN INCHES.
- GENANAL TOLERANCES $\pm$ 0.20mm[.008].

Table 1

PART NO	OF
TSW44-V05R-100	100gf
TSW44-V05R-160	160gf
TSW44-V05R-200	200gf
TSW44-V05R-260	260gf
TSW44-V05R-360	360gf

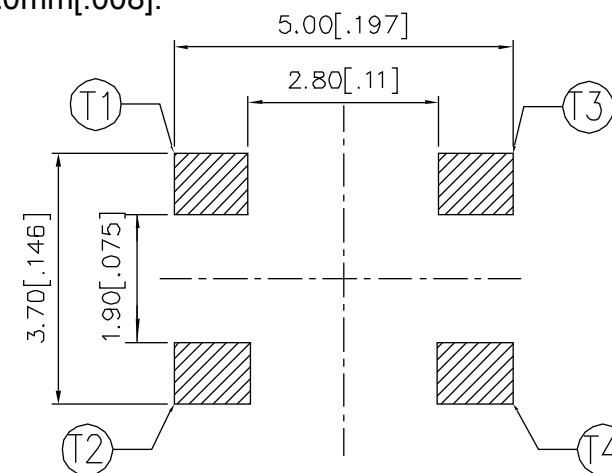

P.C.B. LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE


X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$





照片框

ORDER INFORMATION


TSW44-V05R-xxx-LF

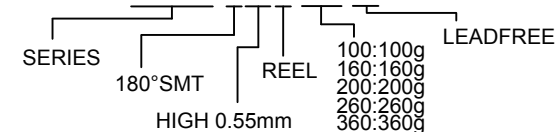

DESCRIPTION:

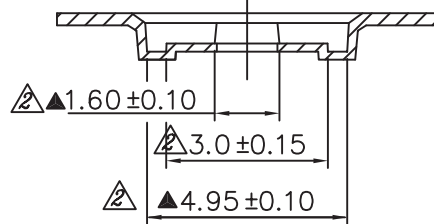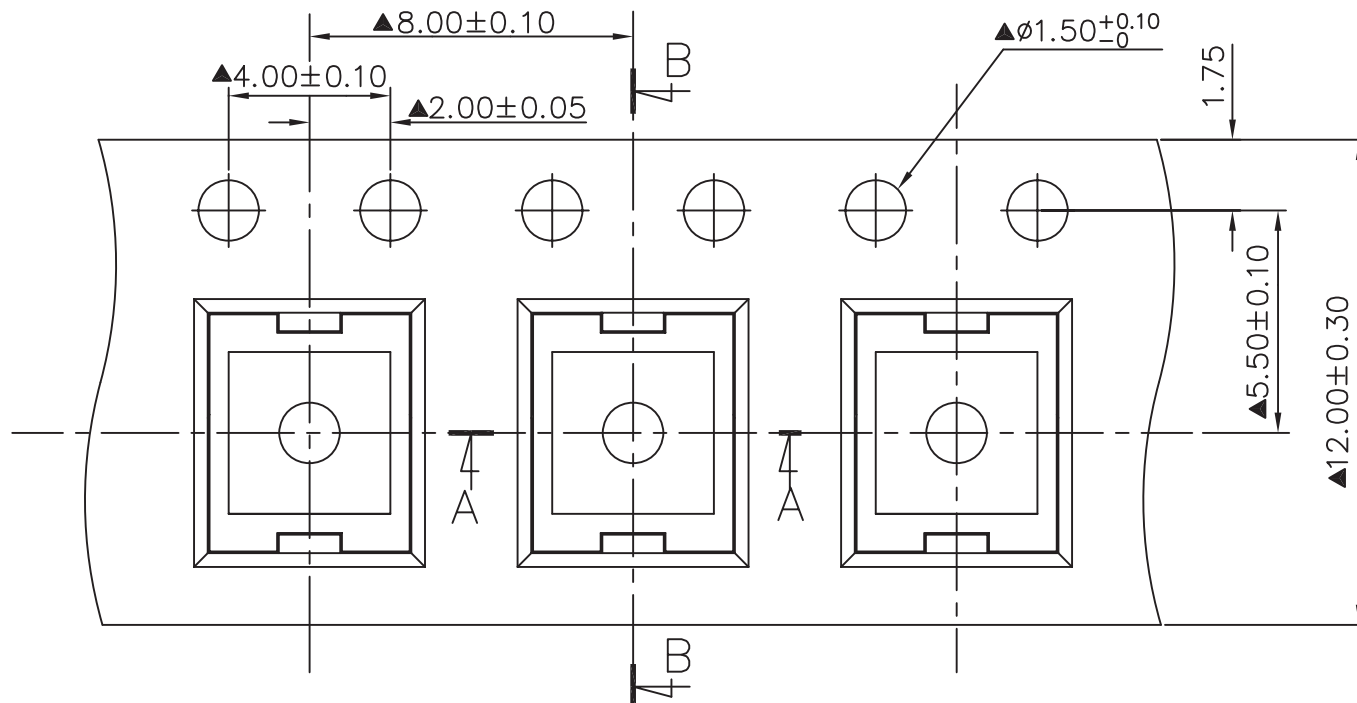

A-A Section

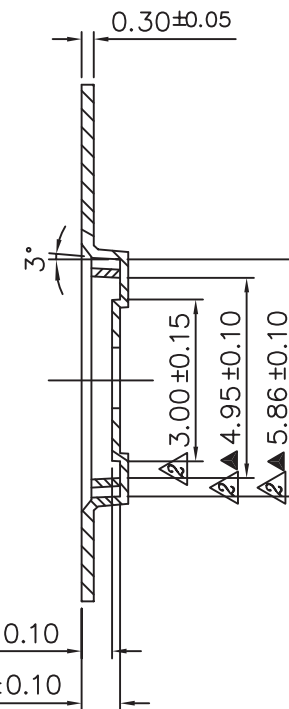

B-B Section

NOTE:

1. Pitch Tolerance Over Any 10 Pitch.
2. General Tolerance : ± 0.10 mm.

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±


.XXX, ±

ANG ±

PPOJECTION

ORDER INFORMATION

TSW44-V05R-xxx-LF

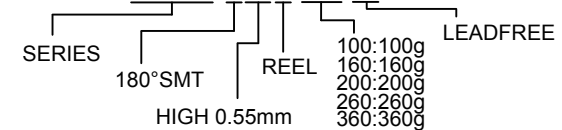

DESCRIPTION: