





PATTERN DIMENSIONS

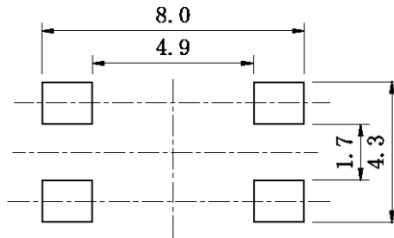

SCHEMATIC



类 型	轻触开关	品 名	
1. 功能规格			
1.1 额定电压	DC12V	1.6 自由位置 (FP)	5.0 ± 0.2mm
1.2 额定电流	50mA	1.7 动作位置 (OP)	
1.3 接触电阻 (CR)	≤ 100m Ω (初始值)	1.8 行程 (PT)	0.25 ± 0.1mm
1.4 操作力 (OF)	170 ± 30gf	1.9 灵敏度 (BT)	≤ 5ms
1.5 回弹力 (RF)		1.10	
2. 可靠度参数			
2.1 机械寿命	100,000 CYCLES	2.5 焊接工艺	手工焊, 回流焊
2.2 电气寿命	100,000 CYCLES	2.6 操作温度	-20° C - +70° C
2.3 绝缘电阻 (IR)	≥ 100M Ω DC250V (初始值)	2.7 储存湿度	< 85%RH
2.4 耐压强度 (WV)	AC250V 1 minute (初始值)	2.8	

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW44-V50-170-LF

SERIES

LEADFREE

170g

HIGH 5.0mm

180°SMT

DESCRIPTION: