
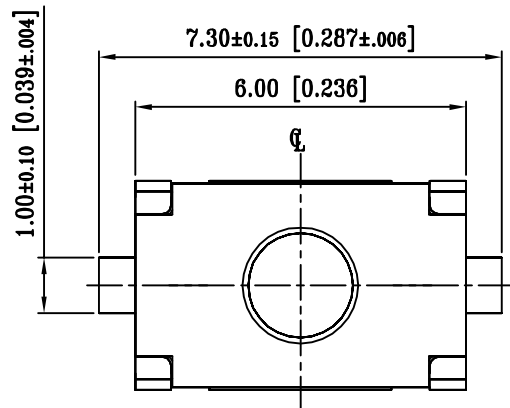
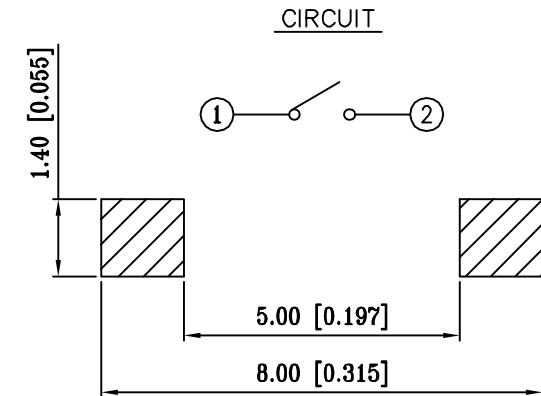
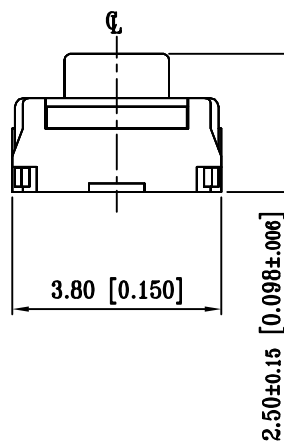


NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2.GENERAL TOLERANCES $\pm 0.2\text{mm}$
3.MECHANICAL:

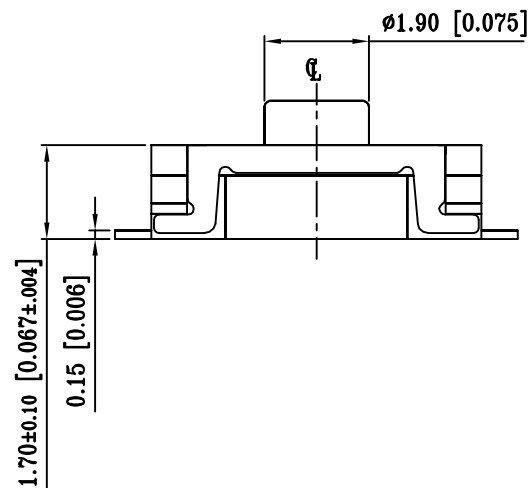

P.C.B. LAYOUT
(VIEW FROM THE DIRECTION A)

Operation Force	Operation Life	Travel	Contact Material
200±50gf	200,000	0.30±0.15	Silver
300±75gf	200,000	0.35±0.15	Silver
450±110gf	100,000	0.45±0.15	Silver
200±50gf	200,000	0.30±0.15	Gold
300±75gf	200,000	0.35±0.15	Gold
450±110gf	100,000	0.45±0.15	Gold

4.ELECTRIAL:
Switch Rating: 50 mA, 12 VDC
Contact Resistance: 100 m Ω MAX
Insulation Resistance: 100 VDC, 100 M Ω MIN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TSW46-V25X-xxx-LF

SERIES

180°SMT

200:200g

450:450g

NON POST

HIGH 2.5mm

LEADFREE

DESCRIPTION: TACT SWITCH