


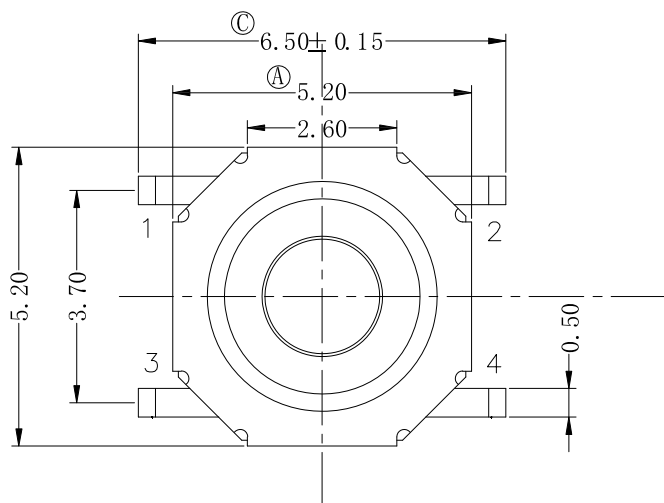
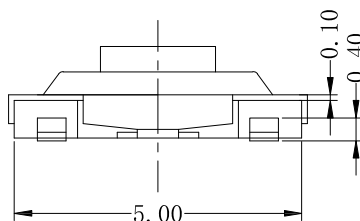


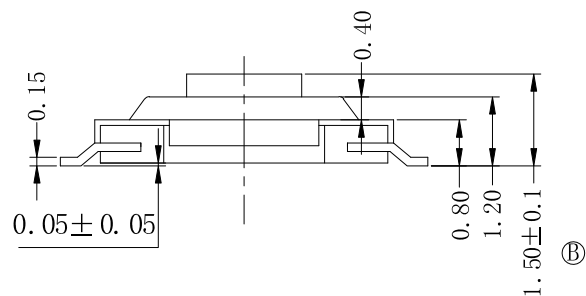


P. C. B. Land Pattern

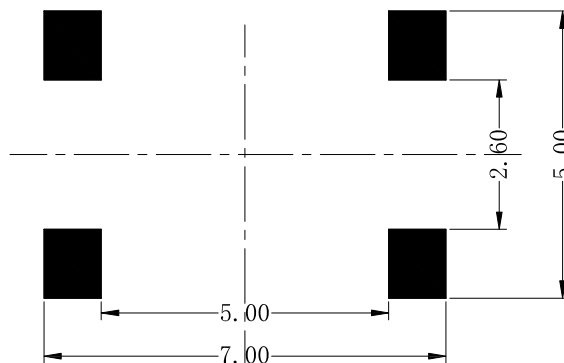

1. Rating: DC 12V 50mA
2. Travel: 0.25 ± 0.1 mm
3. Contact Resistance: $100\text{m}\Omega$ Max
4. Operating Life: 100,000 cycles Min
5. Operating Force: 160 ± 30 gf
6. "A ~ D" Important Size

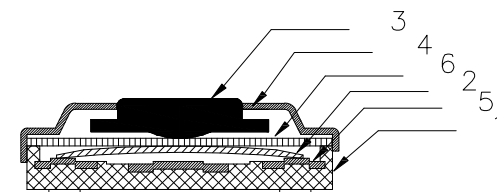

SPECIFICATION



6	膜	PI	1	YELLOW	
5	端子	磷铜	4	Ag	
4	盖子	不锈钢	1	Ag	
3	按钮	黄铜	1	Au	
2	弹片	不锈钢	1	Ag	
1	基座	PPA	1	BLACK	
NO	DESCRIPTION	MATERIAL	SPECIFICATION	TREATMENT	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PROJECTION

照片框

ORDER INFORMATION

TSW55-V15X-160-LF

SERIES

LEADFREE

160g

NON GROUND WIRE

HIGH 1.5mm

180°SMT

DESCRIPTION: