

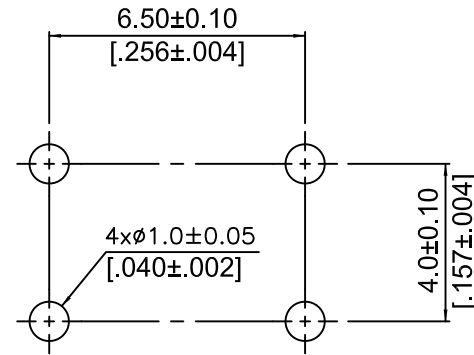


NOTE:



1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES $\pm 0.20\text{mm}$.

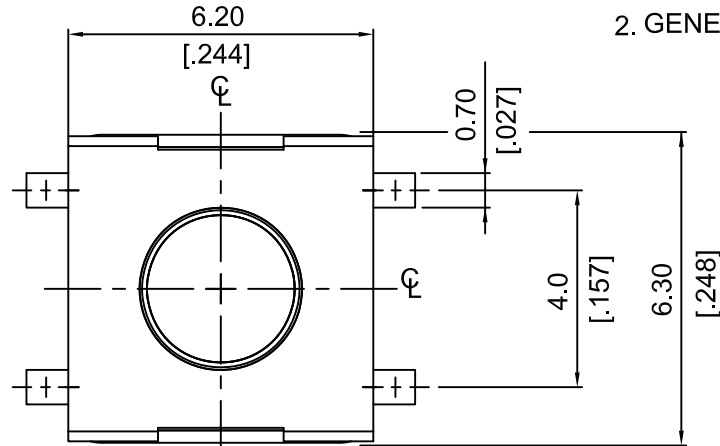

(SCALE 8:1)
P.C.B. LAYOUT

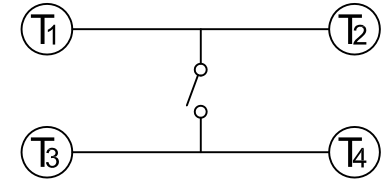

CIRCUIT DIAGRAM

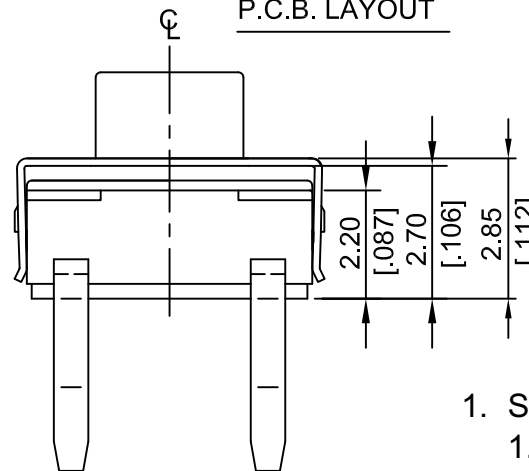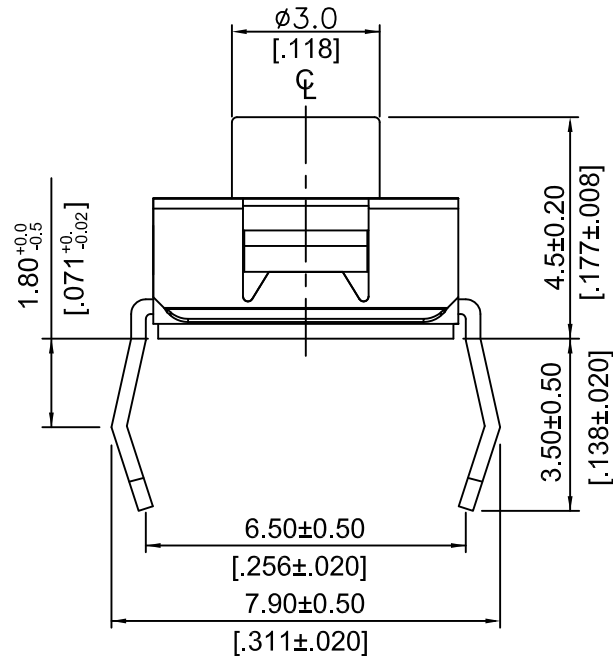

1. Style

- 1.1 Operating Temperature Range : $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 1.2 Storage Temperature Range : $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 1.3 The shelf life of product is within 6 months.

2. Waterproof rank : IP 67

3. Current Range: 50mA, 12V DC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
XX, $\pm$
XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

TSW66-DQ045IP67-xxx-LF

SERIES
DIP 180°
4 PIN
045:4.5mmHIGH
IP67
LEADFREE
180:180g (BROWN)
260:260g (RED)
360:360g (CLARITY)
520:520g (YELLOW)

DESCRIPTION: TACT SWITCH 6X6 THROUGH HOLD / WASHABLE TYPE(H=4.5mm)