


CIRCUIT DIAGRAM



SPECIFICATION

RATING: 50mA, 12V DC Max.

CIRCUIT: 1P-1T.

OPERATING FORCE: 130±30g.




CONTACT RESISTANCE: 100mΩ Max.

TRAVEL: 0.25±0.1mm.

LIFE: 100,000 Cycles Min.

TOLERANCE: .XX=±0.2mm, .X=±0.3mm.

P.C.B LAND PATTERN

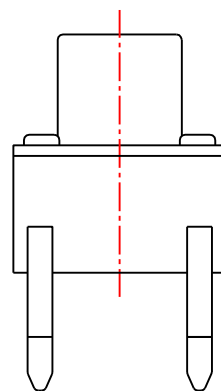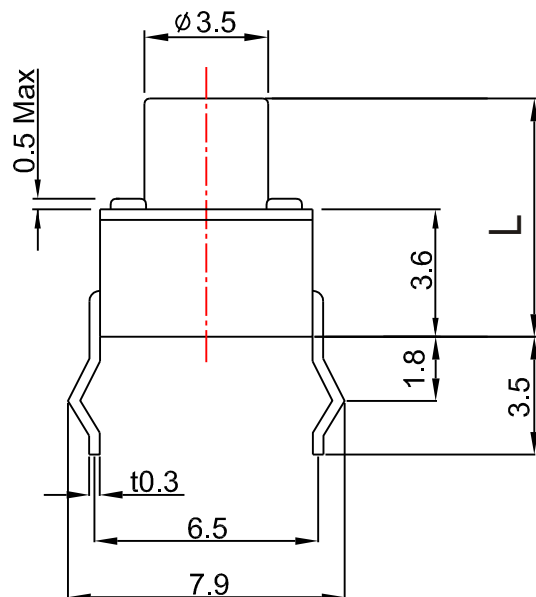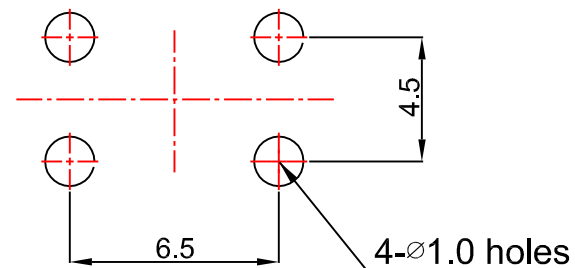

TSW66-DQ050-130-LF

LEADFREE
130g
L=5.0mm

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **TSW-DQ050-130**

DWG NO. **TSW-DQ050-130**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司