
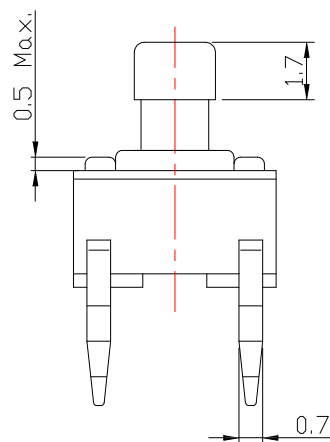
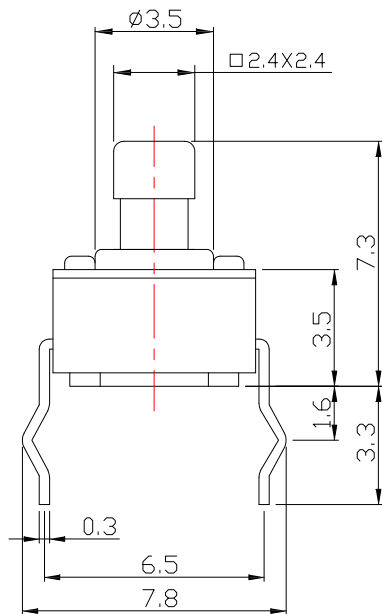
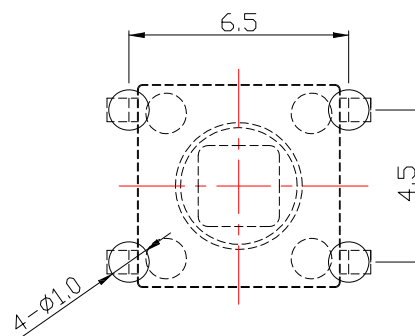


CIRCUIT DIAGRAM

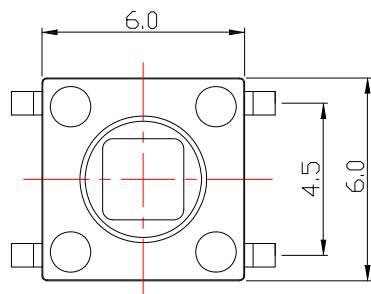

P.C.B LAYOUT
MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	1	2	3
Operating Life (cycle)	100,000 cycles		

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

TSW66-DQ073-xxx-LF
SERIES LEADFREE
130:130g
160:160g
250:250g
DIP 180° HIGH 7.3mm
4 PIN

DESCRIPTION: TACT SWITCH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°