



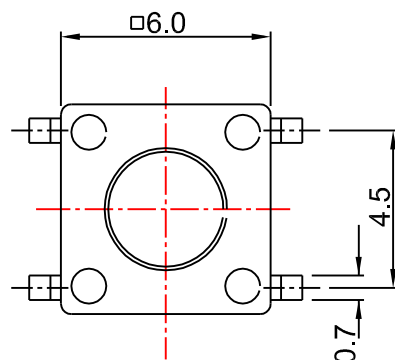

CIRCUIT DIAGRAM



SPECIFICATION

RATING: 50mA, 12V DC Max.

CIRCUIT: 1P-1T.

OPERATING FORCE: 160±30g.




CONTACT RESISTANCE: 100mΩ Max.

TRAVEL: 0.25±0.1mm.

LIFE: 100,000 Cycles Min.

TOLERANCE: .XX=±0.2mm, .X=±0.3mm.

P.C.B LAND PATTERN

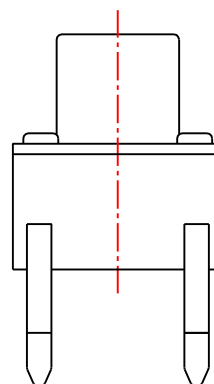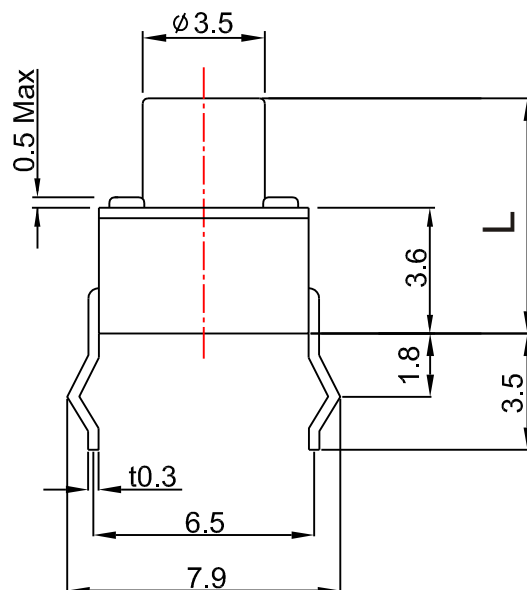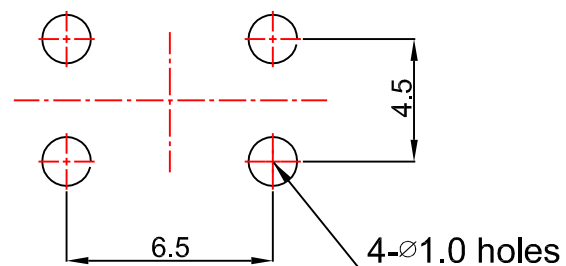

MODEL NO.	L
TSW66-DQ043-160	4.3
TSW66-DQ050-160	5.0
TSW66-DQ070-160	7.0
TSW66-DQ080-160	8.0
TSW66-DQ095-160	9.5
TSW66-DQ125-160	12.5
TSW66-DQ135-160	13.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW66-DQxxx-160-LF

SERIES

LEADFREE

160g

043:4.3mm HIGH

135:13.5mm HIGH

4 PIN

DIP 180°

DESCRIPTION: