
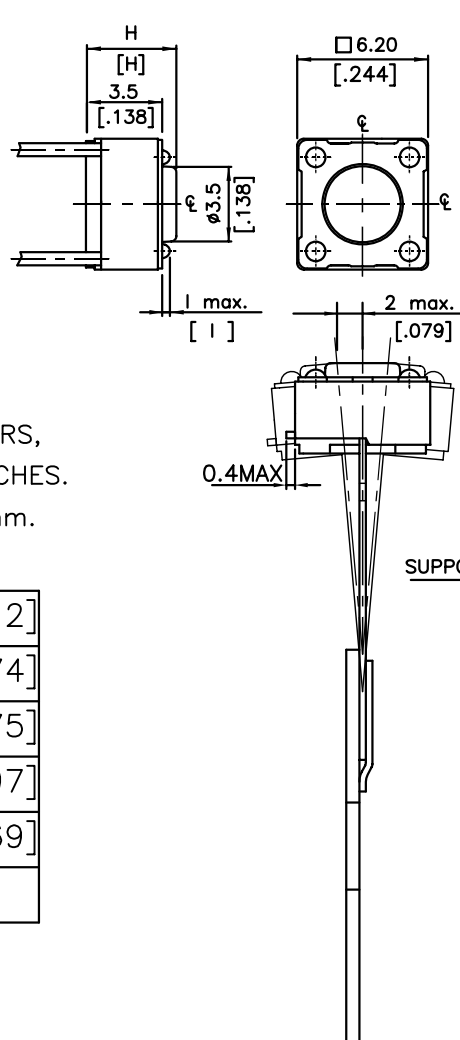


NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX.±0.20mm.

TSW66-DQ130CT-xxx	13.0	[.512]
TSW66-DQ095CT-xxx	9.5	[.374]
TSW66-DQ070CT-xxx	7.0	[.275]
TSW66-DQ050CT-xxx	5.0	[.197]
TSW66-DQ043CT-xxx	4.3	[.169]
PROD.	NO.	H

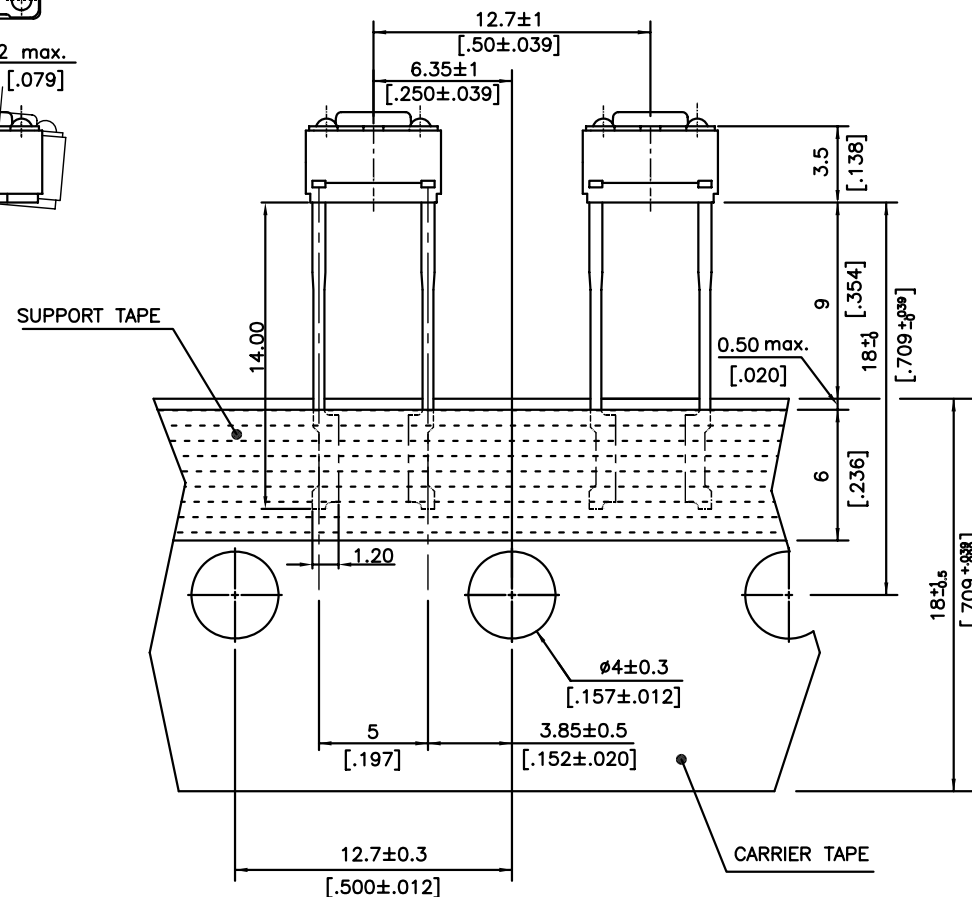

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

TSW66-DQxxxCT-xxx-LF

SERIES	LEADFREE
DIP 180°	100:100g
4 PIN	160:160g
	260:260g
	CARRIER TAPE
	130:13.0mm HIGH

DESCRIPTION: TACT TAPED RADIAL SWITCHES

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±