


CIRCUIT DIAGRAM



SPECIFICATION

Rating: 50mA 12V DC.

Function: OFF-(ON).

Travel: 0.25±0.1mm.

Contact resistance: 100mΩ Max.(initial)

Operating force: 250±50g.

Minimum load: 10mA 3.3V DC.(reference only)



Operating life: 100,000 Cycles Min.

Soldering temperature: 250°C Max. for 3 sec.


Soldering time: 1 time only.

Note1: Unwashable, don't be immersed by epoxy and organic solvent.

Note2: Please check the actual size, do not scale the drawing page.

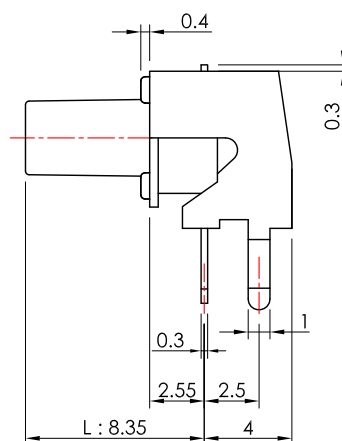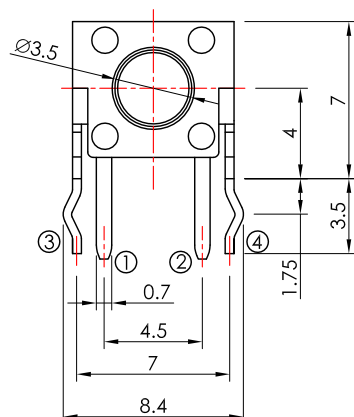

P.C.B. LAYOUT



OPERATING FORCE
100、130、160、250、350

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW66-R83-xxx-LF

SERIES

DIP 90°
8.35mm

LEADFREE

100:100g
130:130g
160:160g
250:250g
350:350g

DESCRIPTION: