



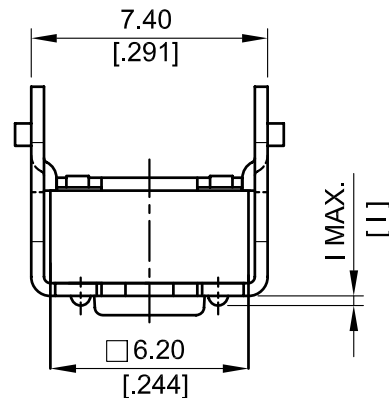


NOTE:



1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX.±0.20mm.

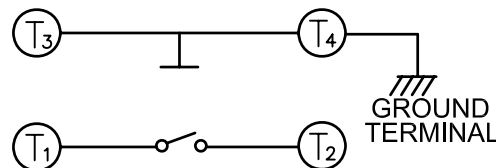

CIRCUIT DIAGRAM

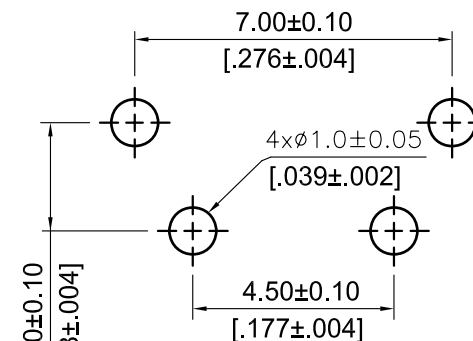

P.C.B. LAYOUT

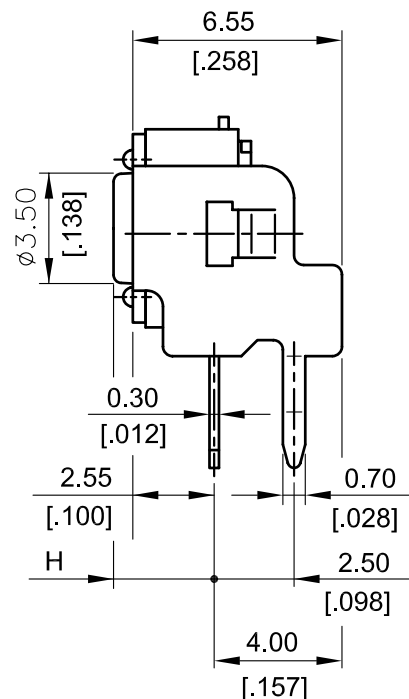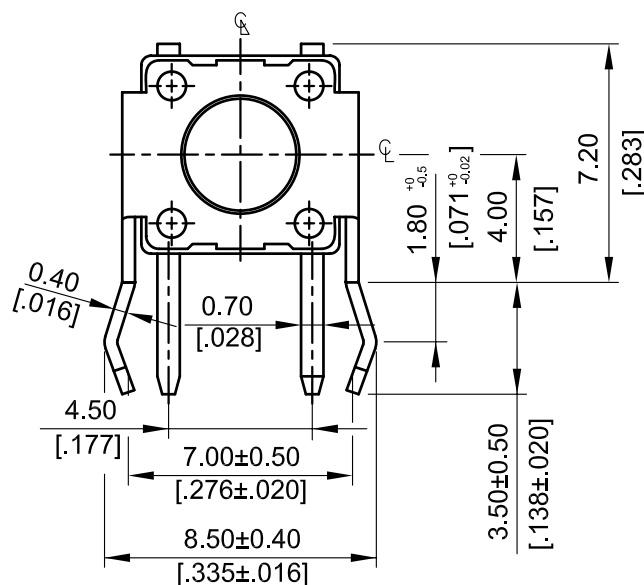

TSW66-R(38~118)-xxx	0.4 MAX	.016 MAX
TSW66-R31-xxx	0.3 MAX	.012 MAX
PROD.	NO.	I
		INCHES.

TSW66-R118-xxx	11.85 [.467]	
TSW66-R83-xxx	8.35 [.329]	
TSW66-R58-xxx	5.85 [.230]	
TSW66-R38-xxx	3.85 [.152]	
TSW66-R31-xxx	3.15 [.124]	
PROD.	NO.	H

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±



ORDER INFORMATION

TSW66-Rxx-xxx-LF

SERIES

31:3.15mm

38:3.85mm

58:5.85mm

61:6.15mm

83:8.35mm

118:11.85mm

LEADFREE

100:100g/BLACK

160:160g/BROWN

260:260g/RED

320:320g/SALMON

520:520g/YELLOW

DESCRIPTION: TACTILE SWITCH R/A (MECHANICAL CONTACT TYPE)