


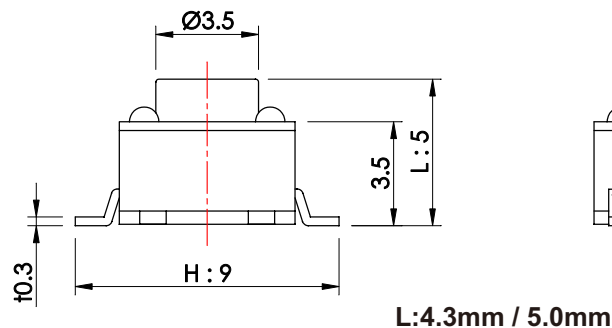
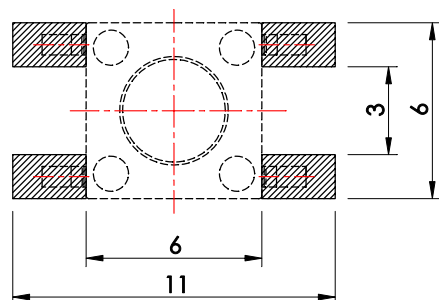


P.C.B. LAYOUT

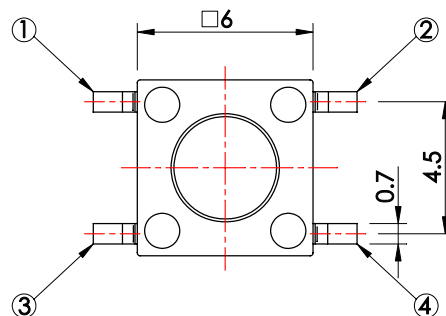

SCHEMATIC



SPECIFICATION

Rating: 50mA 12V DC.

Circuit: SPST.

Function: OFF-(ON).

Travel: 0.25±0.1 mm.

Contact resistance: 100mΩ Max.

Operating force: 160±50g.

Minimum load: 10mA 3.3V DC.(reference only)

Life: 200,000 Cycles.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note: Unwashable, don't be immersed by epoxy and organic solvent.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW66-V050-xxx-LF

SERIES

LEADFREE

100:100g
130:130g
160:160g
250:250g

HIGH 5.0mm
DIP 180°

DESCRIPTION: