



**SMD REFLOW PATTERN**  
(ALL TOLERANCE=±0.05)

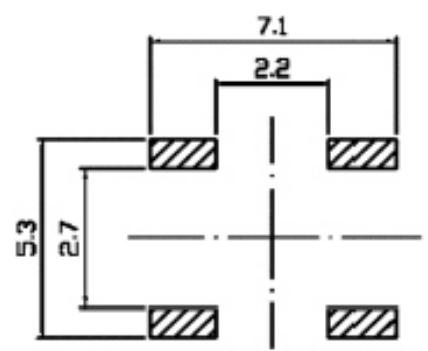

**CIRCUIT DIAGRAM**



**SPECIFICATIONS**

1. RATING : DC 12V, 50mA Max
2. CIRCUIT : 1C - 1P
3. OPERATING FORCE : 250 ±30gf
4. CONTACT RESISTANCE : 100mΩ Max
5. TRAVEL : 0.25 ±0.1mm
6. LIFE : 100,000 Cycles Min
7. TOLERANCE : ±0.3mm
8. CONSTRUCTION : SEALED TYPE

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. **TSW66-V34J-250**

DWG NO. **TSW66-V34J-250**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:				
	AREA	REVISIONS	HK	DATE