



SMD REFLOW PATTERN
(ALL TOLERANCE=±0.05)

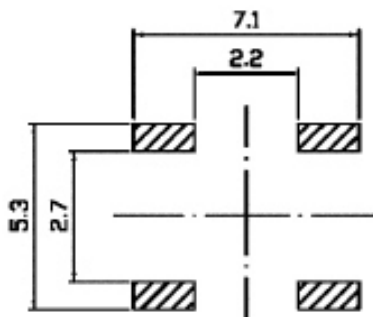

SPECIFICATIONS

1. RATING : DC 12V, 50mA Max
2. CIRCUIT : 1C - 1P
3. OPERATING FORCE : 160 ± 30gf
4. CONTACT RESISTANCE : 100mΩ Max
5. TRAVEL : 0.5 ± 0.15mm
6. LIFE : 100,000 Cycles Min
7. TOLERANCE : ±0.3mm
8. CONSTRUCTION : SEALED TYPE

CIRCUIT DIAGRAM



TSW66-V51J-160-LF
LEADFREE

RoHS Compliant



PART NO. TSW66-V51J-160

DWG NO. TSW66-V51J-160

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司