
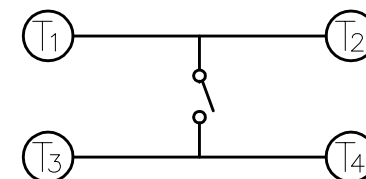
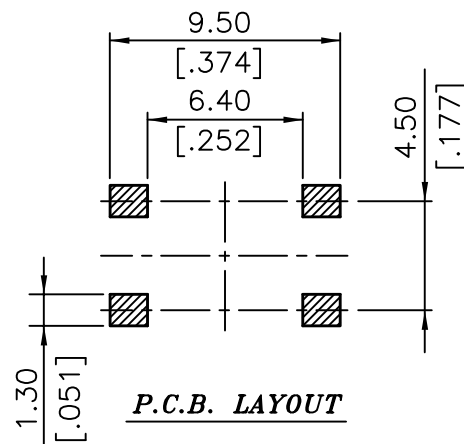


NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.

2. GENERAL TOLERANCES MAX. $\pm 0.20\text{mm}$.

3. MATERIAL & □ : SEE PAGE 3 OF 3.

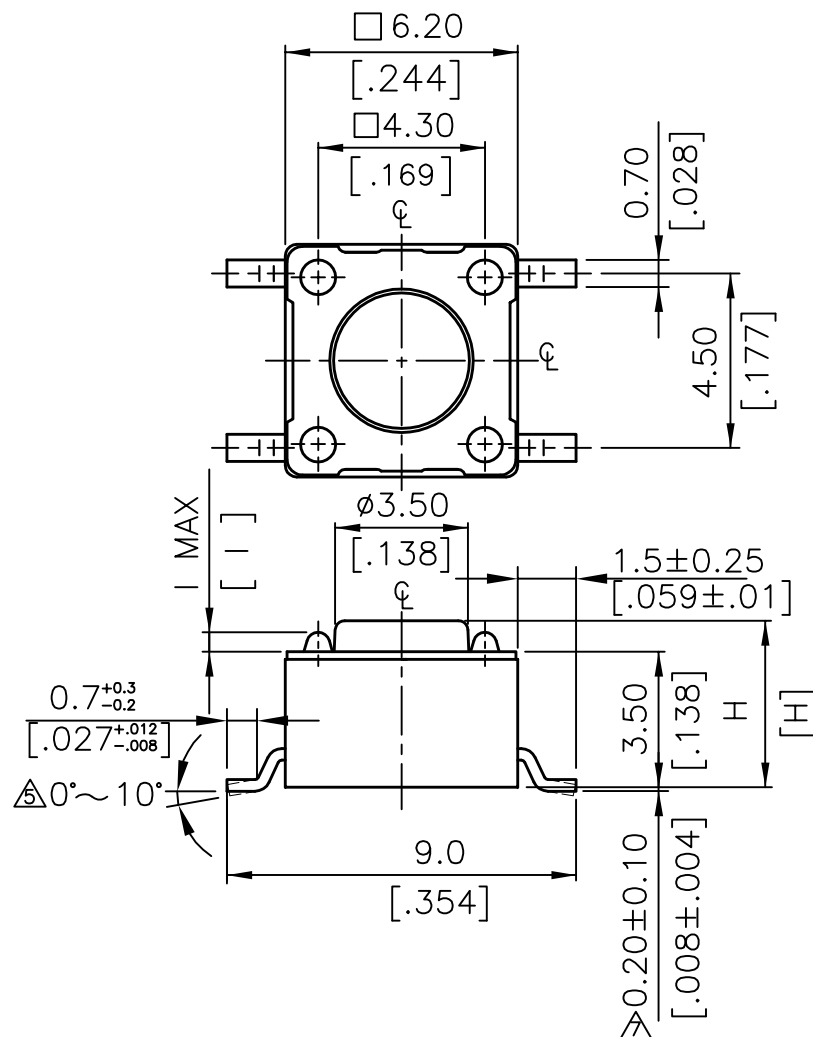

CIRCUIT DIAGRAM

TSW66-V130-260	13.0[.512]	0.6 MAX
TSW66-V095-260	9.5[.374]	0.6 MAX
TSW66-V070-260	7.0[.275]	0.6 MAX
TSW66-V050-260	5.0[.197]	0.6 MAX
TSW66-V043-260	4.3[.169]	0.5 MAX
PROD.	NO.	H I

	先銀壓後沖, 雙面銀壓(Ag/0.3uM MIN)
	先沖後鍍, (Ag/0.5uM MIN)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW66-Vxxx-260-LF

SERIES

LEADFREE

260g (RED)

043:4.3mmHIGH

050:5.0mmHIGH

095:9.5mmHIGH

130:13.0mmHIGH

180°SMT

DESCRIPTION: TACTILE SWITCH SMT TYPE 6X6