

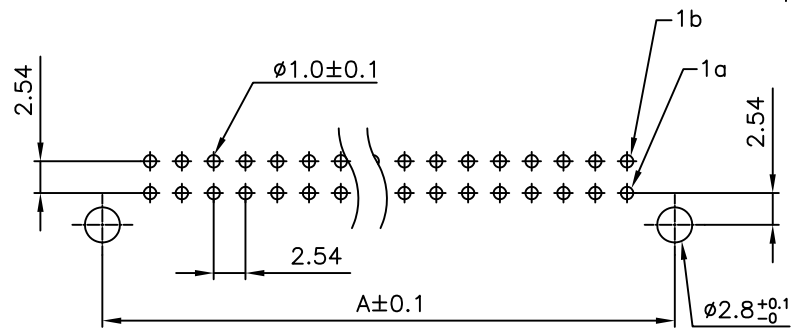
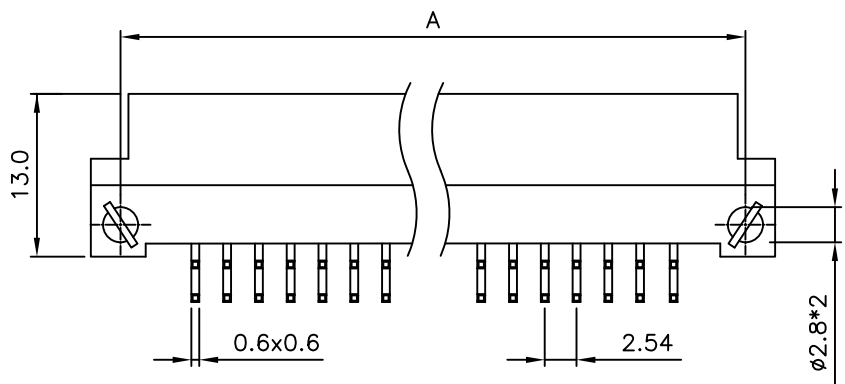


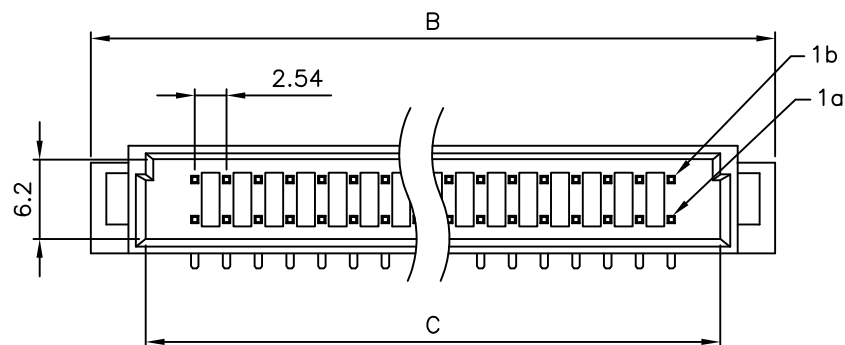

RECOMMENDED P.C.B LAYOUT(TOP VIEW)  
TOLERANCES:  $\pm 0.10\text{mm}$



#### SPECIFICATION

##### MATERIAL

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass Gold plated

##### CONTACT PLATING

S=1u" gold on mating length, 100u" tin on solder  
tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

#### NOTE:

| PART NO.   | A     | B  | C    |
|------------|-------|----|------|
| UB-PR-2X32 | 88.90 | 94 | 85.5 |
| UB-PR-2X16 | 48.26 | 54 | 44.6 |

#### RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.  $\pm 0.30$

CHECKED BY GENIUS

.X  $\pm 0.30$

UNIT / mm

SCALE 1 : 1

.XX  $\pm 0.20$

DATE

.XXX  $\pm 0.10$

ANG  $\pm 1^\circ$

SIZE A4

PPOJECTION

照片框

#### ORDER INFORMATION

UB-PR-2Xxx-LF

SERIES  
LEADFREE  
2X16:32WAY  
2X32:64WAY  
DIP 90°  
MALE

DESCRIPTION: DIN 41612 ( DUAL ROW ) MALE 64PIN & 32PIN

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com