
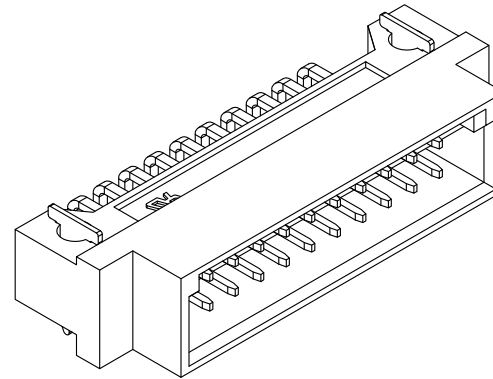


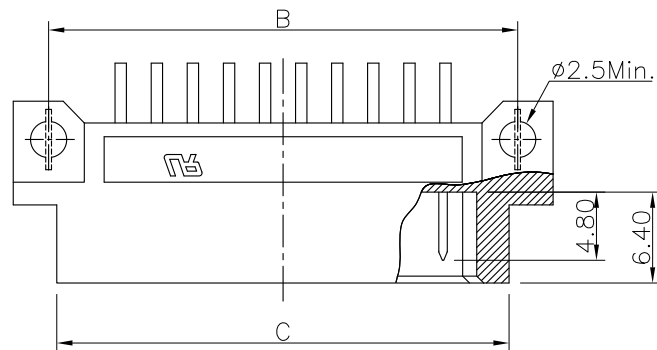

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Brass.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

***RoHS Compliant**

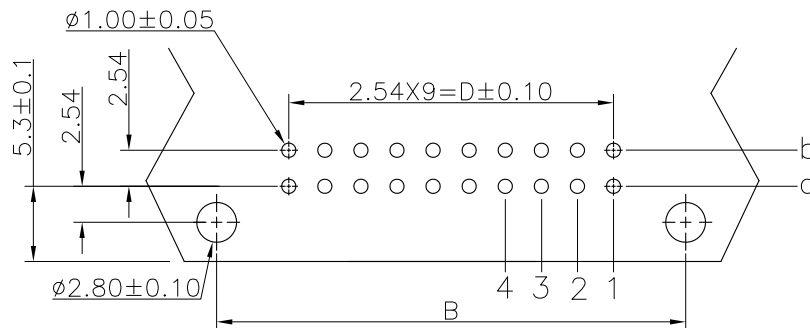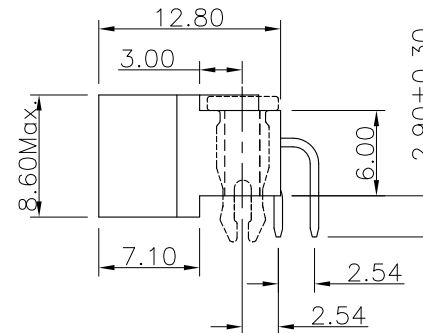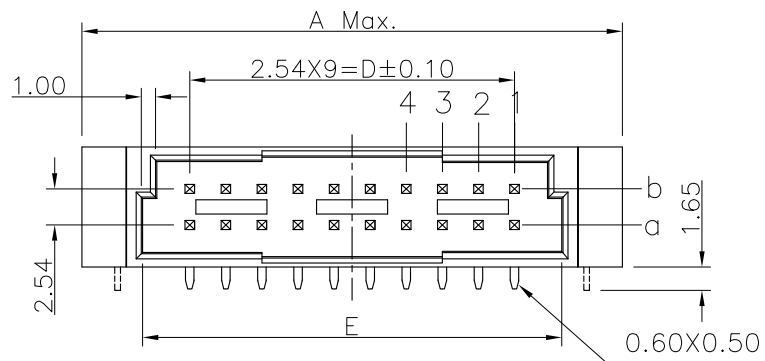

P.C. Board Layout

Dimension					
Pin	A	B	C	D	E
20/10	38.04	33.02	31.80	22.86	29.40
UB-PRZ-1X10			a -	10	2.54mm
UB-PRZ-2X10			a b	20	
P/N	Contact Arrange		Rows with Contacts	Pin	Pitch

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

UB-PRZ-xx10-LF
SERIES
LEADFREE
1X10:10 WAY
2X10:20 WAY
CLIP
DIP 90°
MALE

DESCRIPTION: