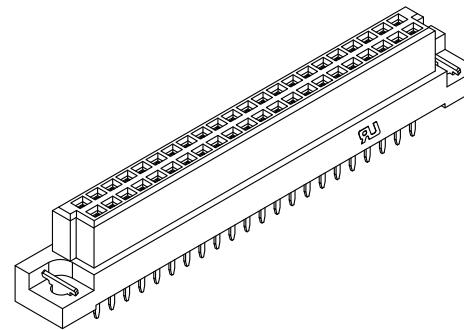
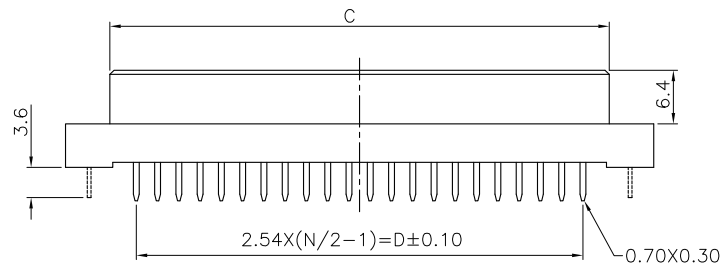
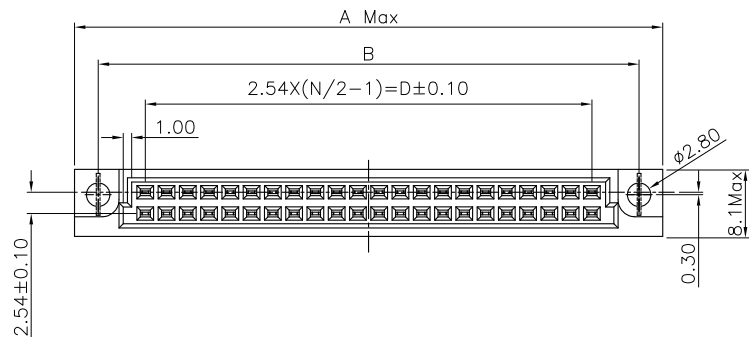


Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .

***RoHS Compliant**

Dimension		A	B	C	D
Position					
44		70.24	64.60	59.64	53.34
32		55.0	49.36	44.36	38.10
2.54mm	44	a b		UB-SDx-2X22	
	32	a b		UB-SDx-2X16	
Pitch	Position	Rows With Contacts	Contact Arrange	P/N	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION 

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

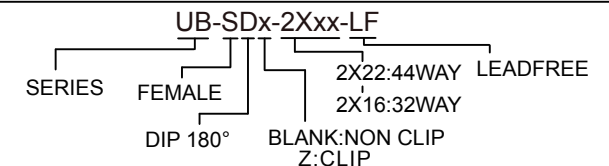

DESCRIPTION: