

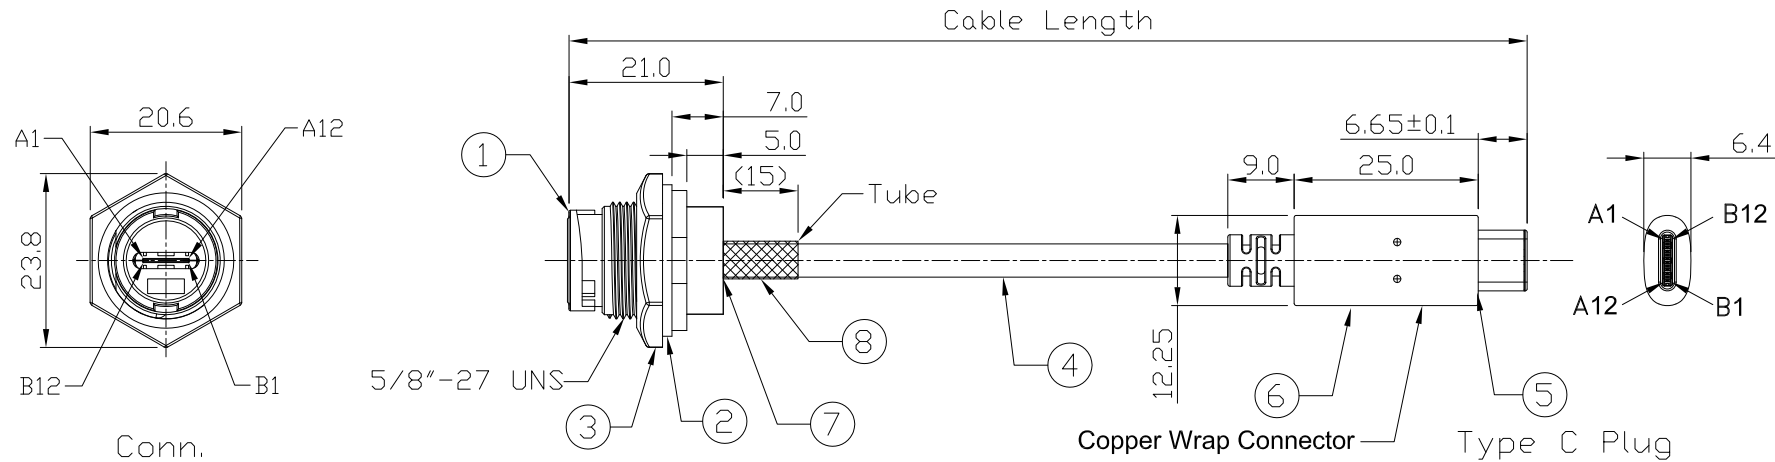


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap
5. RoHS&REACH Compliant.

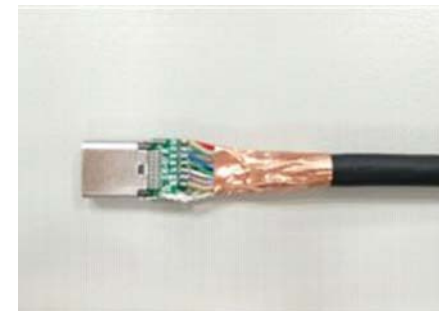

8	Shrink Tube	L=20mm, Heat Shrink Tube With Adhesive Lined Color: Black	1
7	Glue	Epoxy Color: Black	
6	Over Mold	PVC Color: Black	1
5	USB Type C 3.1	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Stainless Steel, Finish: Au Plated	1
4	Cable	(1P/32#+EAM)*4+(1P/32#+A)+(4C/32#)+(1C/24#)+2EAB 85% OD:4.8mm BLACK TPE JACKET.	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Gasket	Silicone Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty

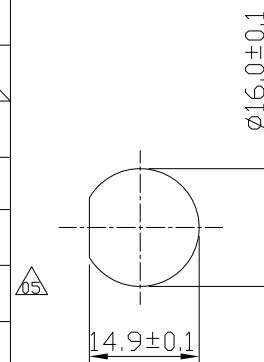

編織需跟雙面導電銅箔導通跟PCB板距離4~5mm

2000 mm	+100
1000 mm	+50
900 mm	+50
800 mm	+50
700 mm	+50
600 mm	+50
500 mm	+50
400 mm	+50
300 mm	+25
200 mm	+25
100 mm	+25
Cable Length	Tol.

Recommend
Panel Cut-Out

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

UBWPUB-24C24C2432BKN-Exxx-LF


SERIES

24 TO 24 C TYPE

24/32 AWG

LEADFREE
2M:2000mm
10C:100mm
MALE TO FEMALE
SCREW-ON
BLACK

DESCRIPTION: USB 3.1 Type C Plastic C2 Panel Jack Lock With Type C Plug

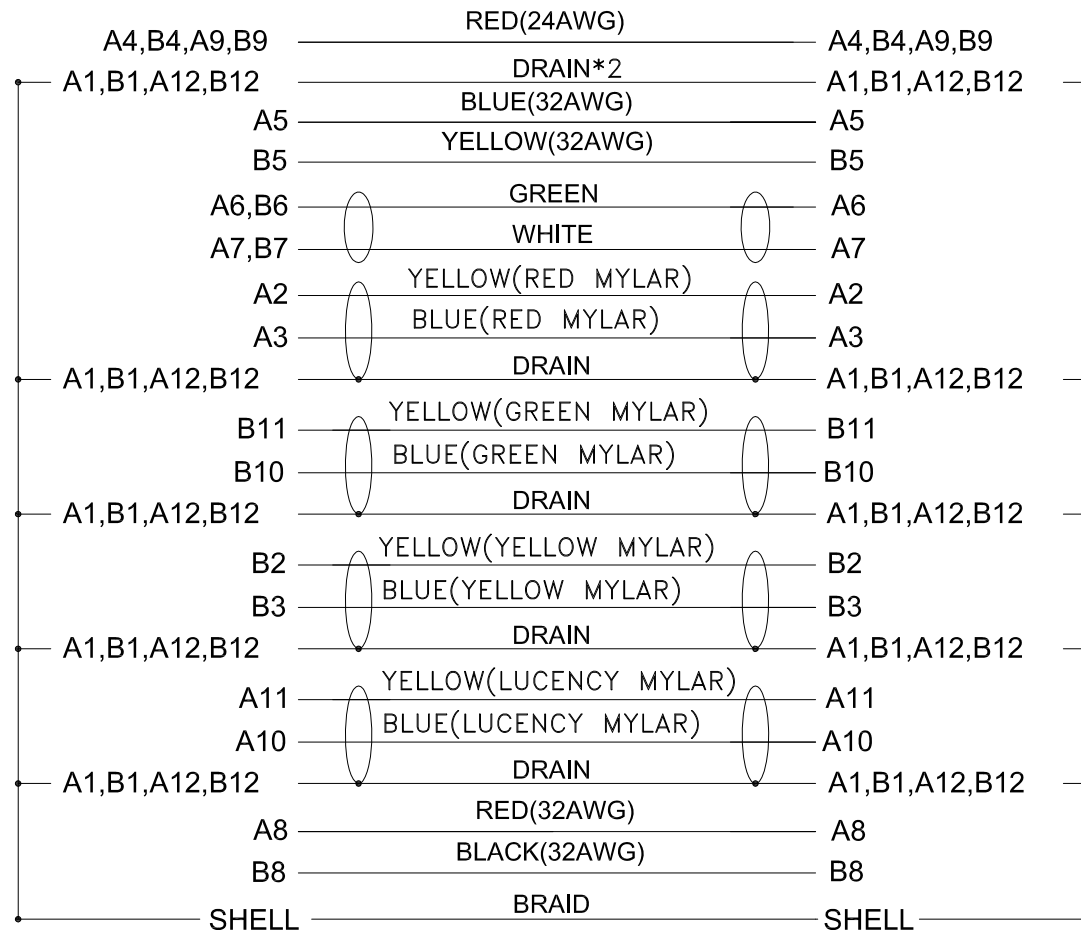

Conn.

Type C Plug

Wiring Diagram

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

UBWPUB-24C24C2432BKN-Exxx-LF

SERIES

LEADFREE

2M:2000mm

10C:100mm

MALE TO FEMALE

SCREW-ON

BLACK

24 TO 24 C TYPE

24/32 AWG

www.morethanall.com

DESCRIPTION: USB 3.1 Type C Plastic C2 Panel Jack Lock With Type C Plug

***CONSTRUCTION:

1.CABLE: * (1P/32#+EAM)*4+(1P/32#+A)+(4C/32#)+(1C/24#)+2EAB 85%
OD:4.8mm BLACK TPE JACKET.

***CONNECTOR:

2.USB C/M: * USB TYPE C MALE SOLDER TYPE,PCB WITHOUT IC,

- * PINS: 30u GOLD PLATED OVER NICKEL.
- * INSULATOR: BLACK THERMOPLASTIC 94V-0 RATED.
- * SHELL: STEEL WITH GOLD PLATED.
- * CAPACITOR.
- * MOLDED: BLACK PVC 45P.

3.USB C/F: * USB TYPE C FEMALE SOLDER TYPE,PCB WITHOUT IC,

- * PINS: 30u GOLD PLATED OVER NICKEL.
- * INSULATOR: BLACK COLOR LCP 94V-0 RATED.
- * SHELL: STEEL WITH GOLD FLASH.

4.TEST: * CT: 2 ohm IS: 5M ohm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

UBWPUB-24C24C2432BKN-Exxx-LF

SERIES

24 TO 24 C TYPE

24/32 AWG

LEADFREE
2M:2000mm
10C:100mm
MALE TO FEMALE
SCREW-ON
BLACK

DESCRIPTION: USB 3.1 Type C Plastic C2 Panel Jack Lock With Type C Plug