



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS Compliant.

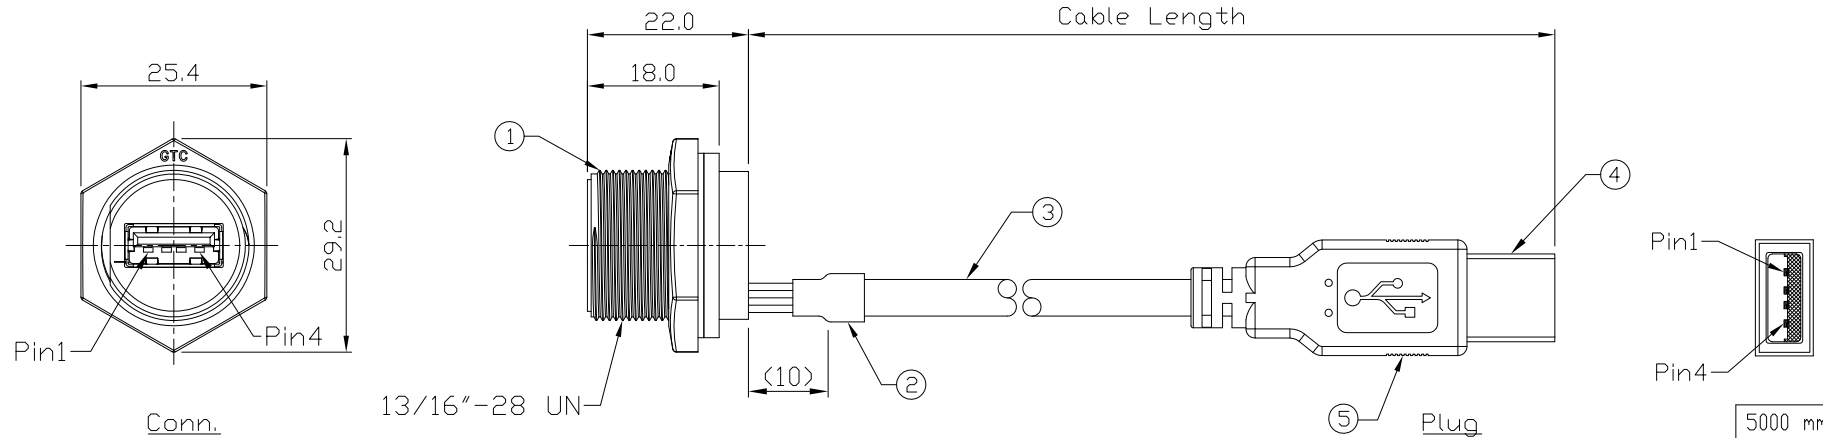


5000 mm	±150
4000 mm	±150
3000 mm	±150
2000 mm	±100
1000 mm	±50
900 mm	±40
800 mm	±40
700 mm	±40
600 mm	±40
500 mm	±40
400 mm	±20
300 mm	±20
200 mm	±10
100 mm	±10
Cable Length	Tol.

5	Over Mold	PVC Color: Black	1
4	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
3	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
2	Shrink Tube	L=20mm Color: Black	1
1		USB-A Plastic C3 Panel Jack Screw With Pig Tail	1
Item	Part Name	Material / Finish	Q'ty

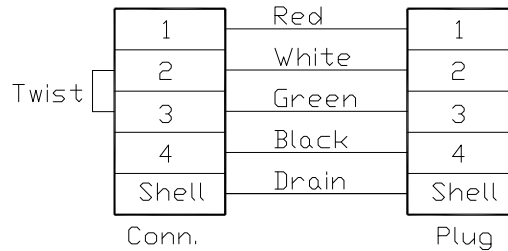

Wiring Diagram



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.50

UNIT / mm SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.05

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UBWPUB-4A4A2428BKM-Exxx-LF

SERIES

LEADFREE

10C: 00mm

5M: 5000mm

4PIN TO 4 PIN A TYPE

24.28AWG

SCREW/ON

BLACK

MALE TO FEMALE

DESCRIPTION: USB-A Plastic C3 Panel Jack Screw With Cable + USB-A Plug

煜倫股份有限公司

www.morethanall.com