



***CONSTRUCTION:

1.WIRE: * UL2725 (1P/28#)+(2C/24#)+AEB65% OD:4.7mm BLACK JACKET.

***CONNECTORS:

2.USB A F: * USB 2.0 A FEMALE PANEL SCREW TYPE.

* PINS: PHOSPHOR BRONZE WITH 30u GOLD PLATED.

* INSULATOR: BLACK THERMOPLASTIC. * SHELL: STEEL WITH NICKETL PLATED.

* HEX NUT: BLACK THERMOPLASTIC.

* GASKET: BLACK SILICONE.

* PCB: FR-4

* GLUE: EPOXY COLOR:BLACK

* MOLDED: BLACK PVC 45P

3.CAP: * CAP PLASTIC FOR USB SCREW PANEL WITH RUBBER CHAIN.

4.USB A M: * USB 2.0 A MALE SOLDER TYPE.

* PINS: PHOSPHOR BRONZE WITH 30u GOLD PLATED.

* INSULATOR: WHITE THERMOPLASTIC. * SHELL: STEEL WITH NICKETL PLATED.

* MOLDED: BLACK PVC 45P


5.TEST: * CT: 2 Ohm. IS: 5M Ohm DC500V 0.1S.


6.GRADE: * WATERPROOF: IP67.

7.PACKING: * PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: * MATERIAL WITH ROHS GRADE.



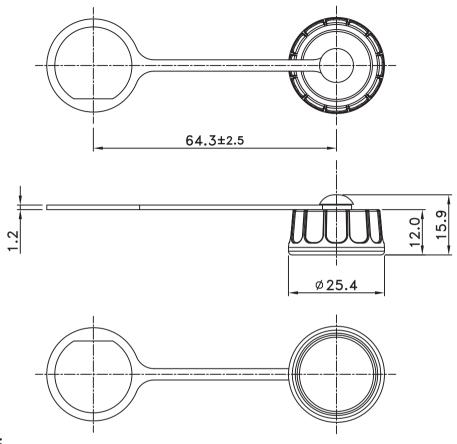



RECOMMEND PANEL CUT-OUT


***CONSTRUCTION:

1.RIVET: * BLACK THERMOPLASTIC.

2.CAP: * BLACK THERMOPLASTIC SCREW TYPE.

3.RUBBER CHAIN: * BLACK TPE.

4.RUBBER PAD: * BLACK SILICONE.

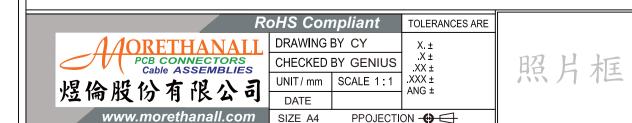

DESCRIPTION: PLASTIC CAP FOR USB SCREW PANEL WITH RUBBER CHAIN.