


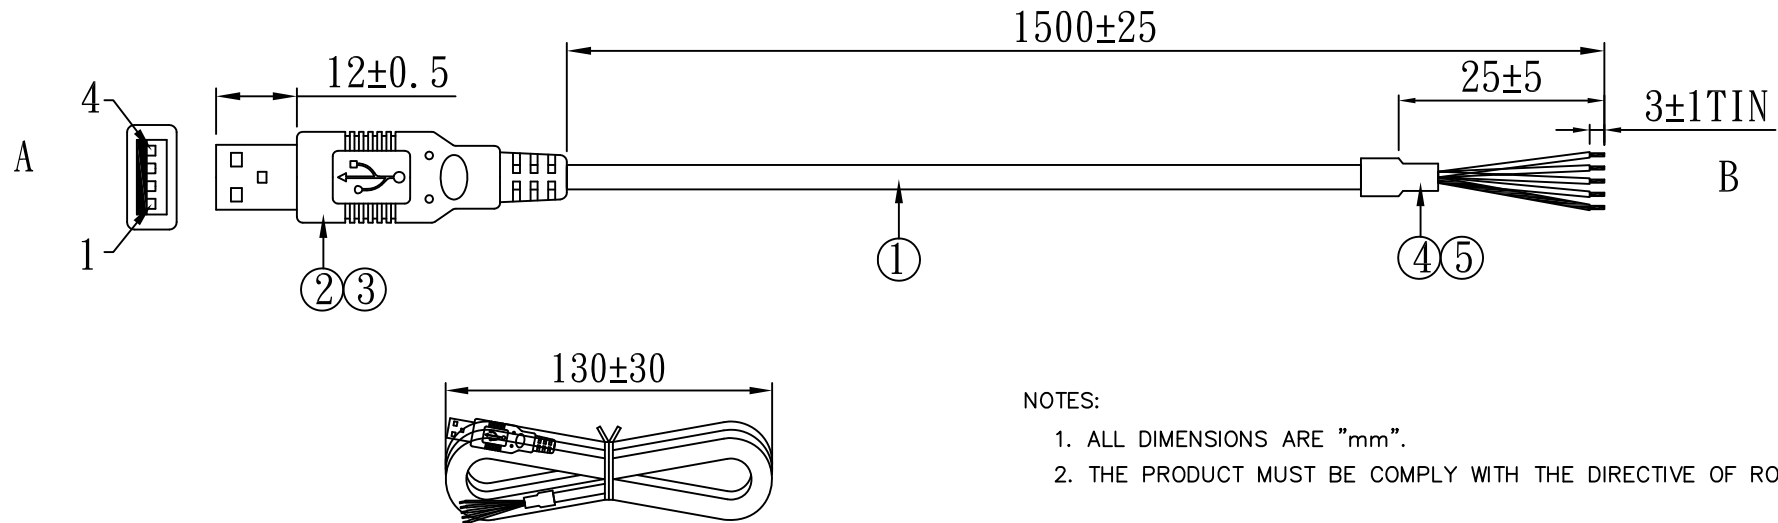

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

WIRING CHART

A	COLOR	B
1	RED	TIN
2	WHITE	TIN
3	GREEN	TIN
4	BLACK	TIN
SHELL	DRAIN	TIN

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL2725 #28*1PR(WHITE, GREEN)+#24*2C(RED, BLACK) +AEB JACKET:BLACK OD:Ø4.5 USB2.0	1pcs	E238846
2	CONN:	USB A TYPE 公 4P WHITE USB2.0	1set	
3	OUT MOLDER:	PVC 45P BLACK NO.: GH-016	8.5G	
4	SHRINK TUBE:	0.8Ø*21mm BLACK F32	1pcs	E203950
5	SHRINK TUBE:	5Ø*15mm BLACK F32	1pcs	E203950
6	MINI TIE:	BLACK L:100	1pcs	
7				
8				
9				
10				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBX1-4A002428-M1M5-LF

SERIES

LEADFREE

1500mm

MALE

24/28AWG

4 PIN A TYPE

DESCRIPTION: CABLE ASS"Y