
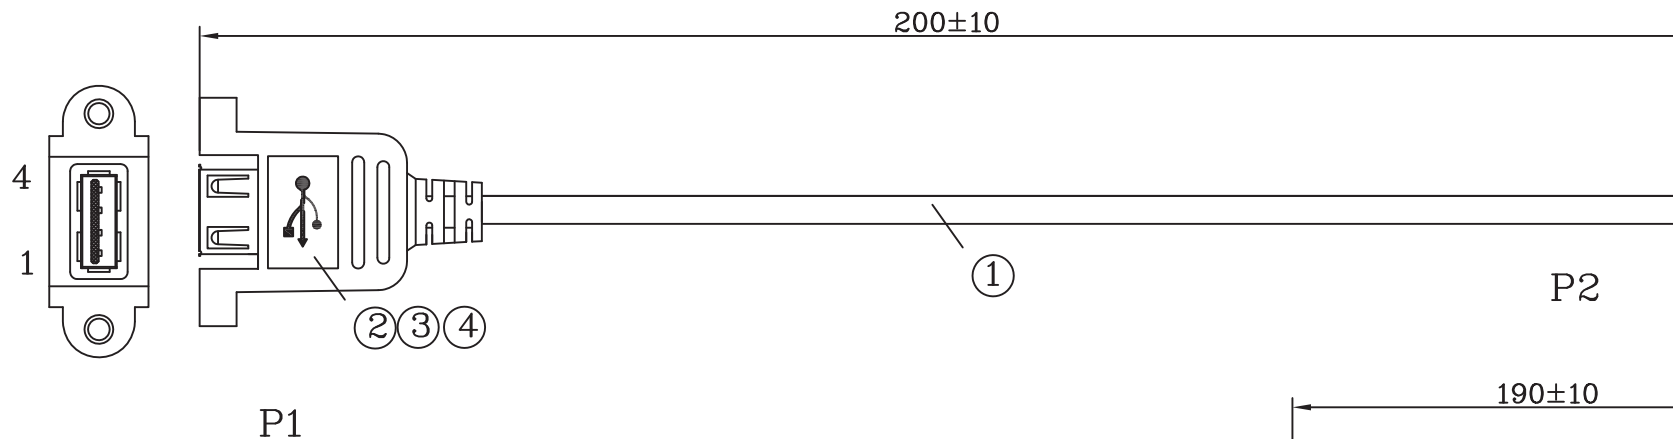


WIRING DIAGRAM

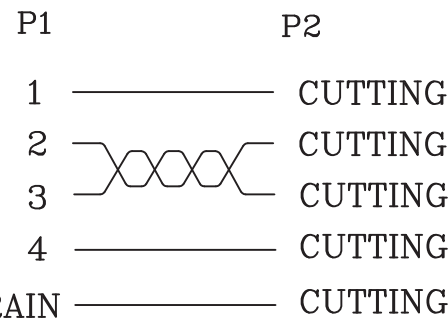

1. EACH FLOOR WITH 200PCS,TOTAL=2 FLOOR
1 CARTON WITH 400PCS.
2. 1 CARTON WITH 1PCS BIGPE BAG.
3. CARTON SIZE:L495*W300*H295MM

PART NO	USB A FEMALE TO CUTTING
DESCRIPTION	USB CABLE
SPECIFICATION	200MM(M+M) Ø4.5
DATE OF MANUFACTURE	2009-3-14
QUANTITY	200

6	BAG	1	SET	L:190*W:70*T:0.05MM
5	TUBE	1	SET	UL/CSA 125*300V Ø1.5*8MM #BK
4	SCREW	2	SET	#4-40 7*5MM
3	PVC	5	G	45P PVC #CLR-002
2	CONNECTOR	1	SET	USB A TYPE FEMALE GOLD 30U"PLATED INSULATOR WHITE USB 2.0
1	CABLE	210	mm	UL2725 28AWG*1P+24#*2C+AEB65% OD:4.5MM #CLR-002 USB 2.0
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBX1-4A002V28PE-F20C-LF
SERIES
4 PIN A TYPE
28AWG
2.0 REV
920mm
FEMALE
PANEL
LEADFREE

DESCRIPTION: