


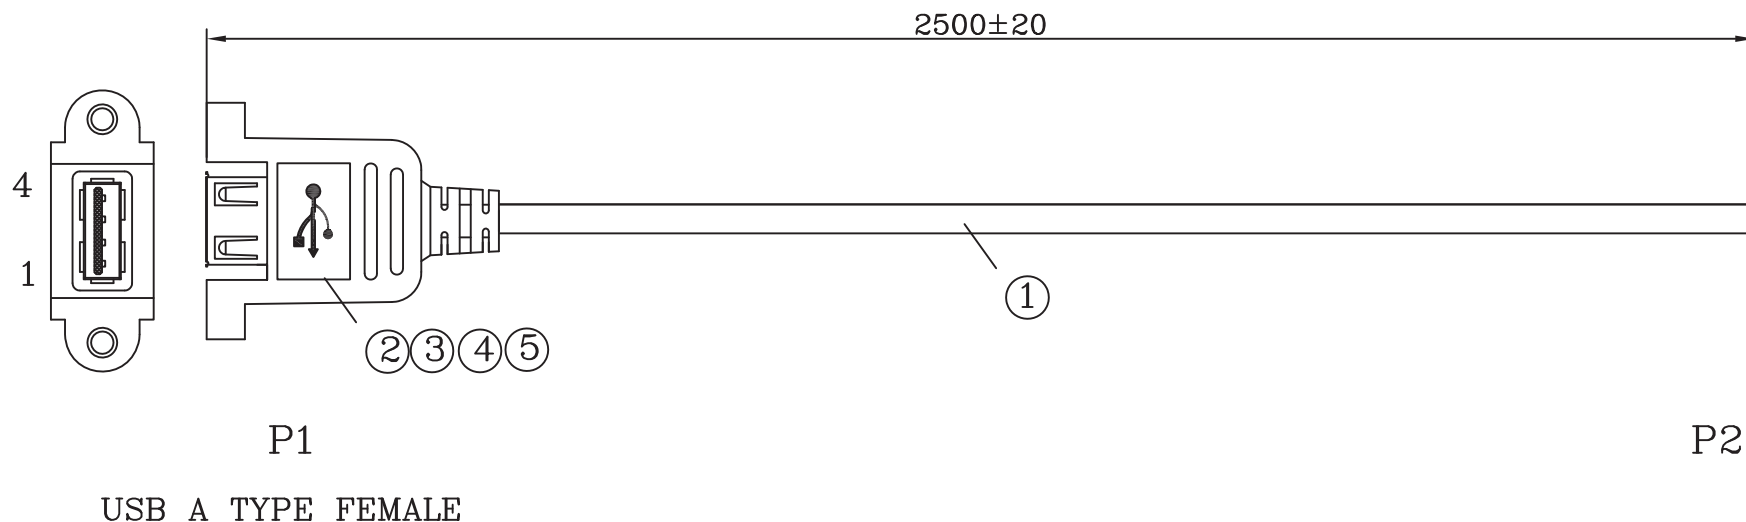

WIRING DIAGRAM

	P1		P2
RED	1	—————	OPEN
WHITE	2	—————	OPEN
GREEN	3	—————	OPEN
BLACK	4	—————	OPEN
BRAID+DRAIN		—————	OPEN

6	TUBE	1	SET	UL/CSA 125°300V Ø1.5*8MM #BK
5	SCREW	2	SET	#4-40 7*5MM
4	PVC	7	G	45P PVC #GRAY
3	PE	4	G	PE(LD)
2	CONNECTOR	1	SET	USB A TYPE MALE PIN G/F #WHITE
1	CABLE	2500	mm	UL2725 28AWG*1P+24#*2C+AE65% OD:4.5MM #GRAY USB 2.0
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX1-4A002V28PE-F2M5-LF

SERIES

4 PIN A TYPE

2500mm

LEADFREE

FEMALE

PANEL

28AWG

2.0 REV

DESCRIPTION: USB A F L: 2500mm GRAY