


包裝方式: 單PCS包裝.

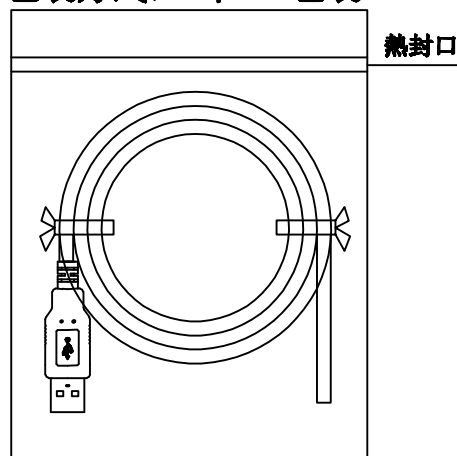

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: $2\Omega/\text{max}$.
3. Insulation Resistance: $20M\Omega/\text{min}$.
4. Hi-Pot: 300v dc/10ms.

PIN OUT

P1	P2
1	OPEN RED (紅)
2	OPEN WHITE (白)
3	OPEN GREEN (綠)
4	OPEN BLACK (黑)
SHELL	BRAID+DRAIN OPEN (編織+地線)

PART LIST: 本产品均符合“ROHS”环保标准，用的材料均为相当品。

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
3	PVC: 45P BLACK		
2	USB AM: GOLD FLASH CONNECTOR, NICKEL PLATED SHELL, PLASTIC: WHITE		KG/K
1	CABLE: UL2725 26#(7/0.16TS)*1P+24#(11/0.16TC)+20#D7/0.12TS+AEB+B80/0.10TCCS OD: 4.5mm COLOR: BLACK...	1	PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBX1-4A1C2426-M3M2-LF

SERIES

MALE

24.26 AWG

CUT OFF

4 PIN A TYPE

LEADFREE

3200mm

DESCRIPTION: USB AM TO 尾端切齐 CABLE BLACK L=3200MM