


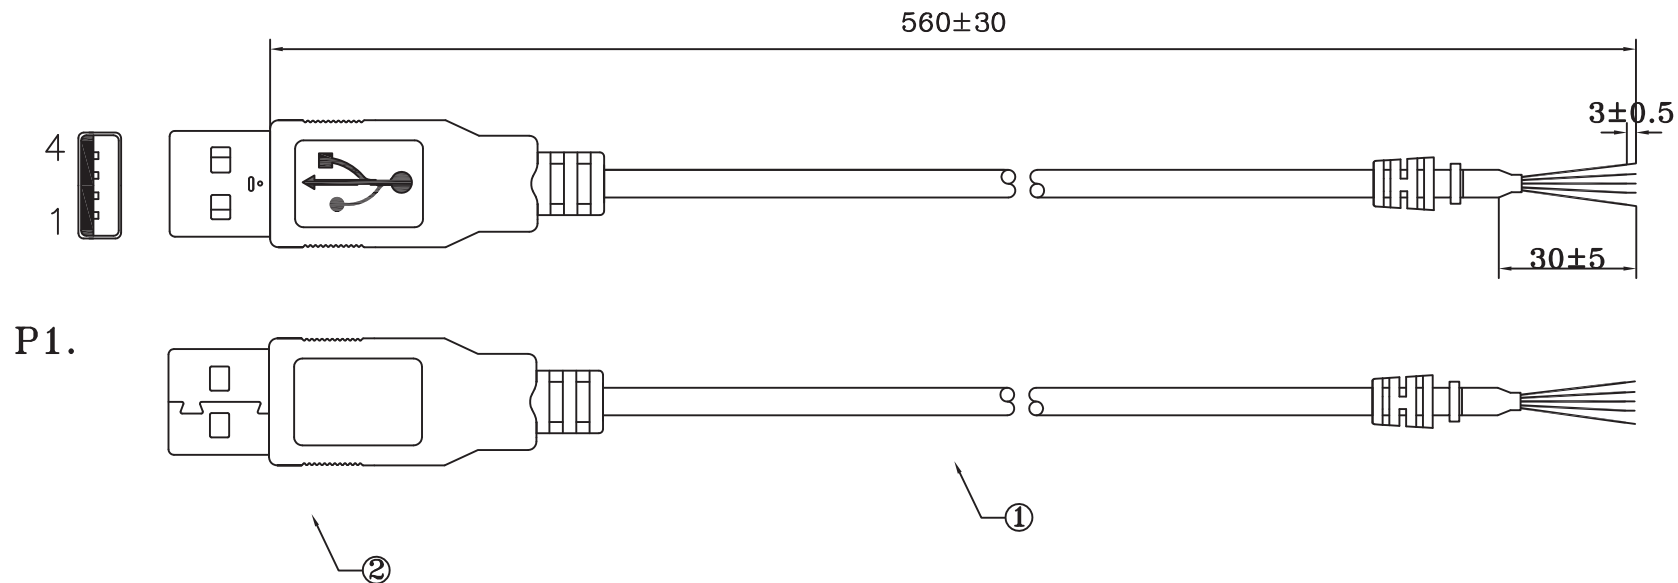

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 3ohm max
3. Insulation Resistance: 10mega ohm MIN
4. Hipot etst: DC 300V 10ms

2.	USB CONN.: A TYPE,MALE,SOLDER TYPE, GOLD-FLASH. INSULATOR: PBT, WHITE. FRONT SHELL Ni-PLATED, BACK SHELL Ni-PLATED. WITH SPRING.
1.	CABLE: UL2725 28AWGx1P+28AWGx2C+AEB(Al). PVC JACKET BLACK. OD=ø3.5±0.15mm.
NO.	NOTES:

WIRE ARRANGEMENT		
P1	COLOR	
1	RED	
2	WHITE	
3	GREEN	
4	BLACK	
CASE	BRAID SHIELD	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

UBX1-4A1X28-M22N-LF
SERIES | LEADFREE
560mm
MALE
28AWG
4 PIN A TYPE

DESCRIPTION: