

P1


YS121462

P2

USB A M

S/T

WIRING DIAGRAM

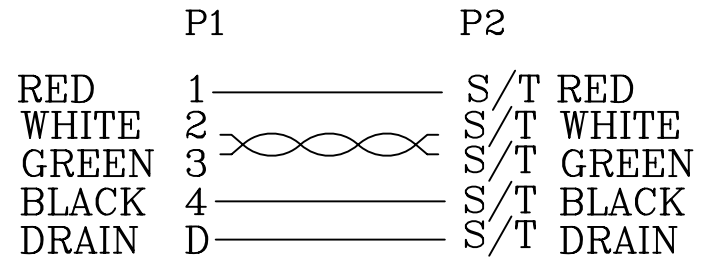

2	CONNECTOR	1	SET	USB A TYPE MALE G/F #WHITE
1	CABLE	2100	mm	UL2725 28AWG*1P(WHITE, GREEN)+24AWG*2C(RED, BLACK)+AEB OD:4.5±0.15mm #BLACK (LD) (VENDER FOR UL2725 USB2.0 APPROVED)
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION

照片框

ORDER INFORMATION

UBX1-4A1X2V2428-M2M08-LF

SERIES

4 PIN A TYPE

SR

2.0 REV

24/28AWG

MALE

2080mm

LEADFREE

DESCRIPTION: USB A MALE L:2.08M BLACK