



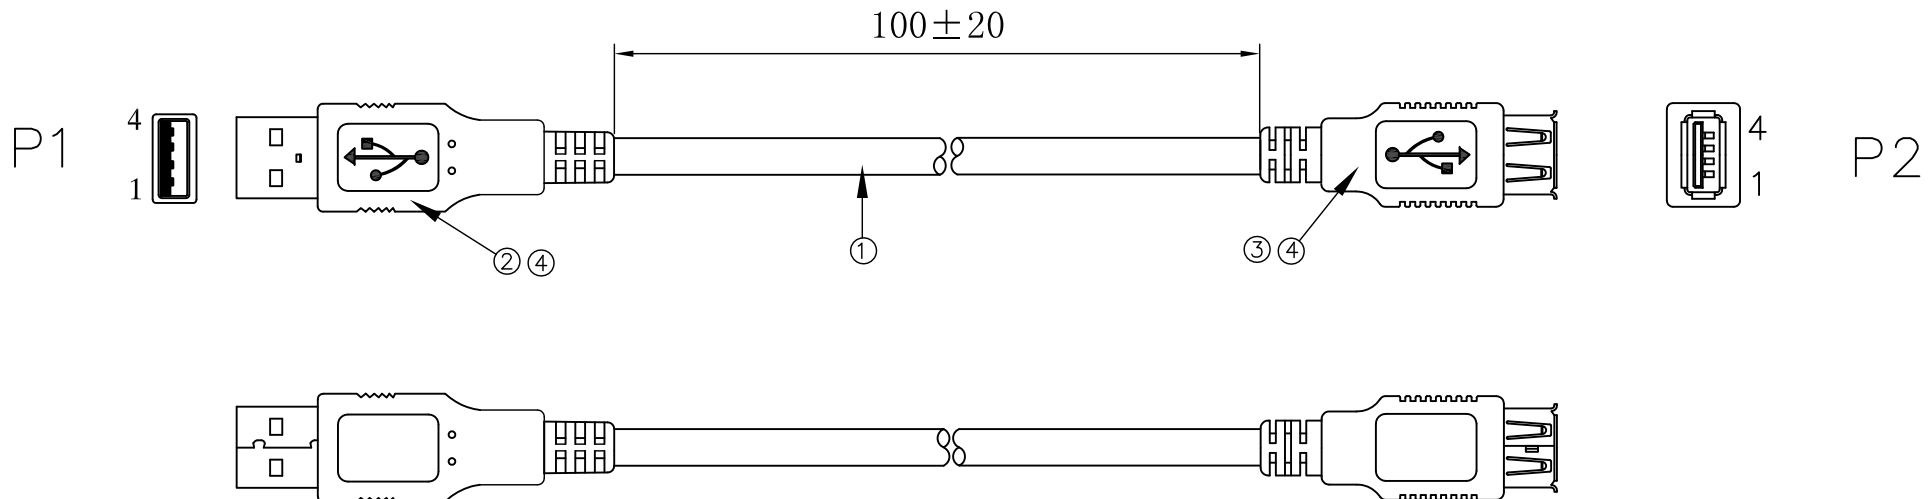

ELECTRICAL PROPERTIES:

1. 100% Open Short Mis -Wire Test
2. Contact Resistance: 2 ohm max
3. Insulation Resistance: 10mega ohm min
4. Hipot test: DC 100V 10ms

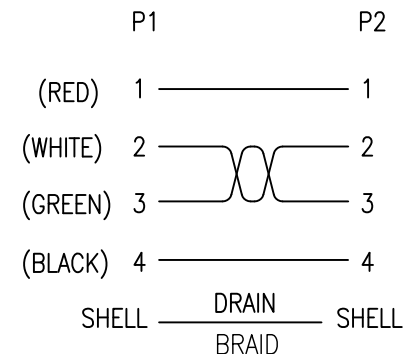

④	PVC 45P 黑色	12G
③	USB A/F G/F 白膠芯	1PCS
②	USB A/M G/F 白膠芯	1PCS
①	UL2725 #28/1P+#28/2C+AB(AL) OD:3.5 BLACK	1PCS
NO.	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

UBX2-4A4A28-E10C-LF

SERIES

LEADFREE
100mm
MALE TO FEMALE
28 AWG
4 PIN TO 4 PIN A TYPE

DESCRIPTION: USB AM/AF L=100mm

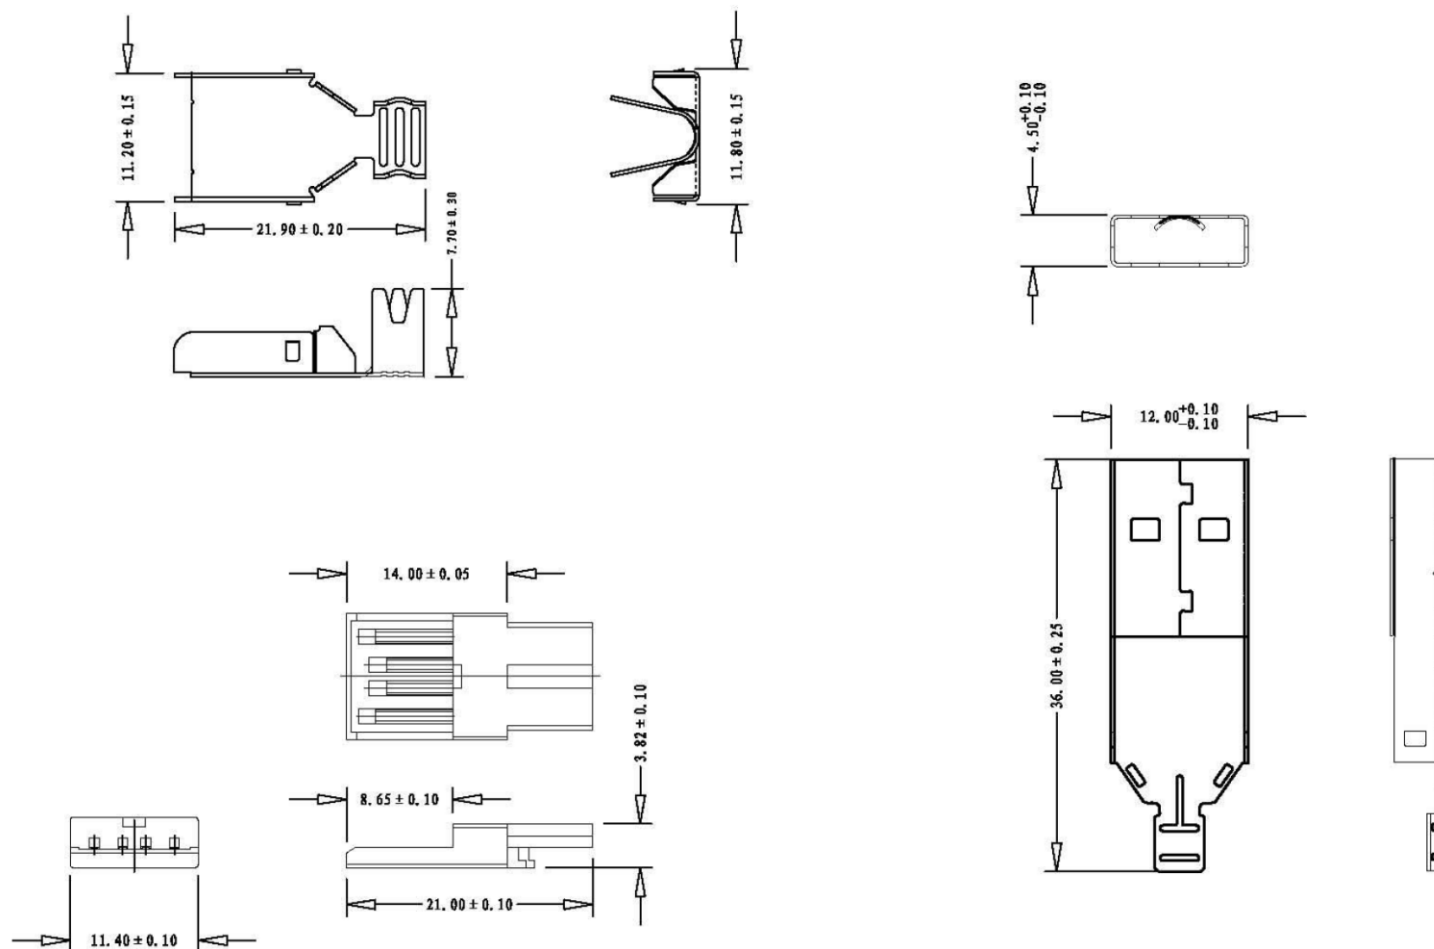

NOTE:

1. Material: contacts: C2680 EH T=0.20
insulator: PBT+30%GF
shell: SPCC T=0.30
2. Plating: a. contacts: a. Nickel plated 50U"
b. Gold plated: GOLD FLASH 3U" 5U" 15U" 30U"
c. Shell: CU plated 80U" Nickel plated 80U"
foggy test 12H

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-PSWH-4A-LF
SERIES | LEADFREE
4 PIN A TYPE
WHITE
SOLDER
MALE

DESCRIPTION:

