


ELECTRICAL PROPERTIES

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE 5 OHM MAX
3. INSULATION RESISTANCE 20 MEGA OHM MIN
4. HIPOT TEST DC 300V 10MS

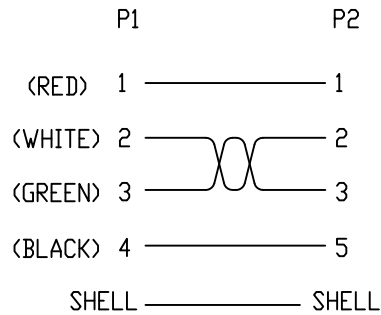

④	PVC 45P BLACK	20	G
③	USB B/M G/F 殼鍍鎳 白胶芯	1	PCS
②	USB A/M G/F 殼鍍鎳 白胶芯	1	PCS
①	UL2725 #28/1P+#28/2C+AEB(AL) OD:3.5 BLACK	1	PCS
NO.	DESCRIPTION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4A4B28-M1M5-LF

SERIES

LEADFREE

1500mm

MALE TO MALE

28 AWG

4 PIN A TYPE TO 4 PIN B TYPE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: