


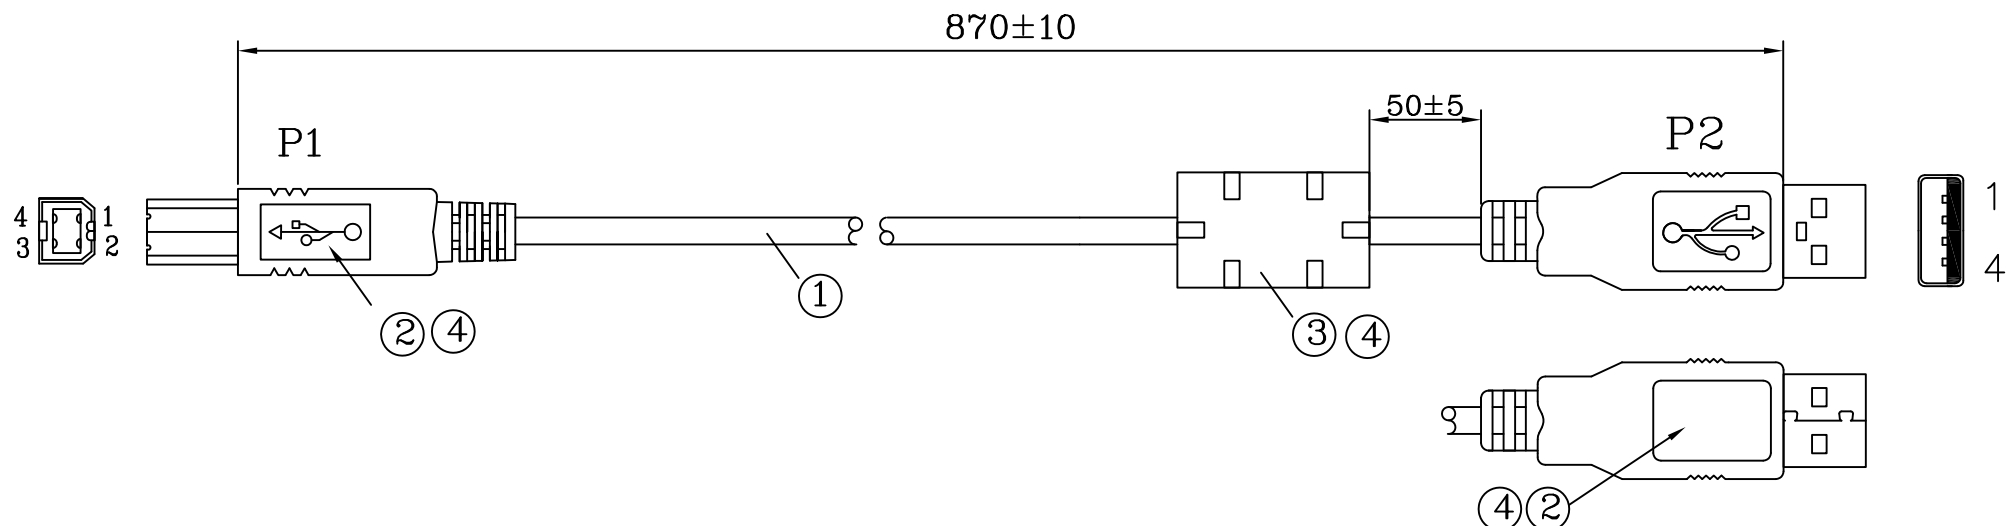

WIRING DIAGRAM

P1

P2

1	1	RED
2	2	WHITE
3	3	GREEN
4	4	BLACK

SHELL BRAID+DRAIN SHELL

4	PVC	10	G	45P PVC CLR-002
3	CORE	1	SET	B15 RH 9.8*25*5.2MM
2	CONNECTOR	1	SET	USB B TYPE MALE 30U" #WHITE USB 2.0 USB A TYPE MALE 30U" #WHITE USB 2.0
1	CABLE	200	mm	UL2725 28AWG*1P+24#*2C+AB65% OD:4.5MM USB 2.0 CLR-002
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4A4B2V2428FC1-M87C-LF

SERIES

LEADFREE

870mm

MALE TO MALE

FERRITE CORE

4 PIN A TYPE TO 4 PIN B TYPE

24/28 AWG

2.0 REV

DESCRIPTION: USB A M/B M+CORE L:870mm CLR-002