


P1.
USB A M

P2.
USB B M

WIRING DIAGRAM

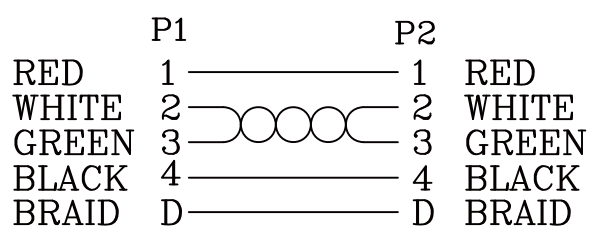

4	CORE	2	PCS	RH 12(OD)*6.5(ID)*L20mm
3	CONN.	1	PCS	USB B MALE SOLDER
2	CONN.	1	PCS	USB A MALE SOLDER
1	CABLE	5000	mm	UL2725 28AWG*1P(WHITE, GREEN)+24AWG*2C (RED, BLACK)+AEB OD:4.5mm #GRAY RE2.0
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

UBX2-4A4B2VFC-M5M-LF
SERIES | LEADFREE
5000mm
MALE TO MALE
FERRITE CORE
2.0 REV
4 PIN A TYPE TO 4 PIN B TYPE

DESCRIPTION: USB A M / B M / 5M / CORE / BEIGE