


WIRING DIAGRAM

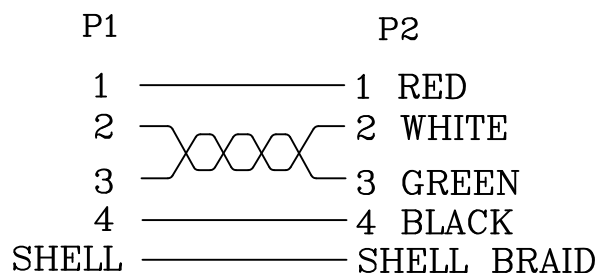

2	CONN.	1	SET	USB A TYPE MALE G/F WHITE USB A TYPE FEMALE G/F WHITE
1	CABLE	xxx	mm	UL2725 28AWG*1P+28AWG*2C+AEB(4/16) OD:3.5±0.15mm # BLACK HALF FOG (VENDER FOR UL2725 USB2.0 APPROVED)
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4AR4A28-Exxx-LF

SERIES

LEADFREE

16C:16CM

1M5:1.5MTR

MALE TO FEMALE

28AWG

4 PIN A TYPE 90° TO 4 PIN A TYPE

DESCRIPTION: DP2.0-2\*5PH/DP2.0-2\*5P+KEY/0.3M