


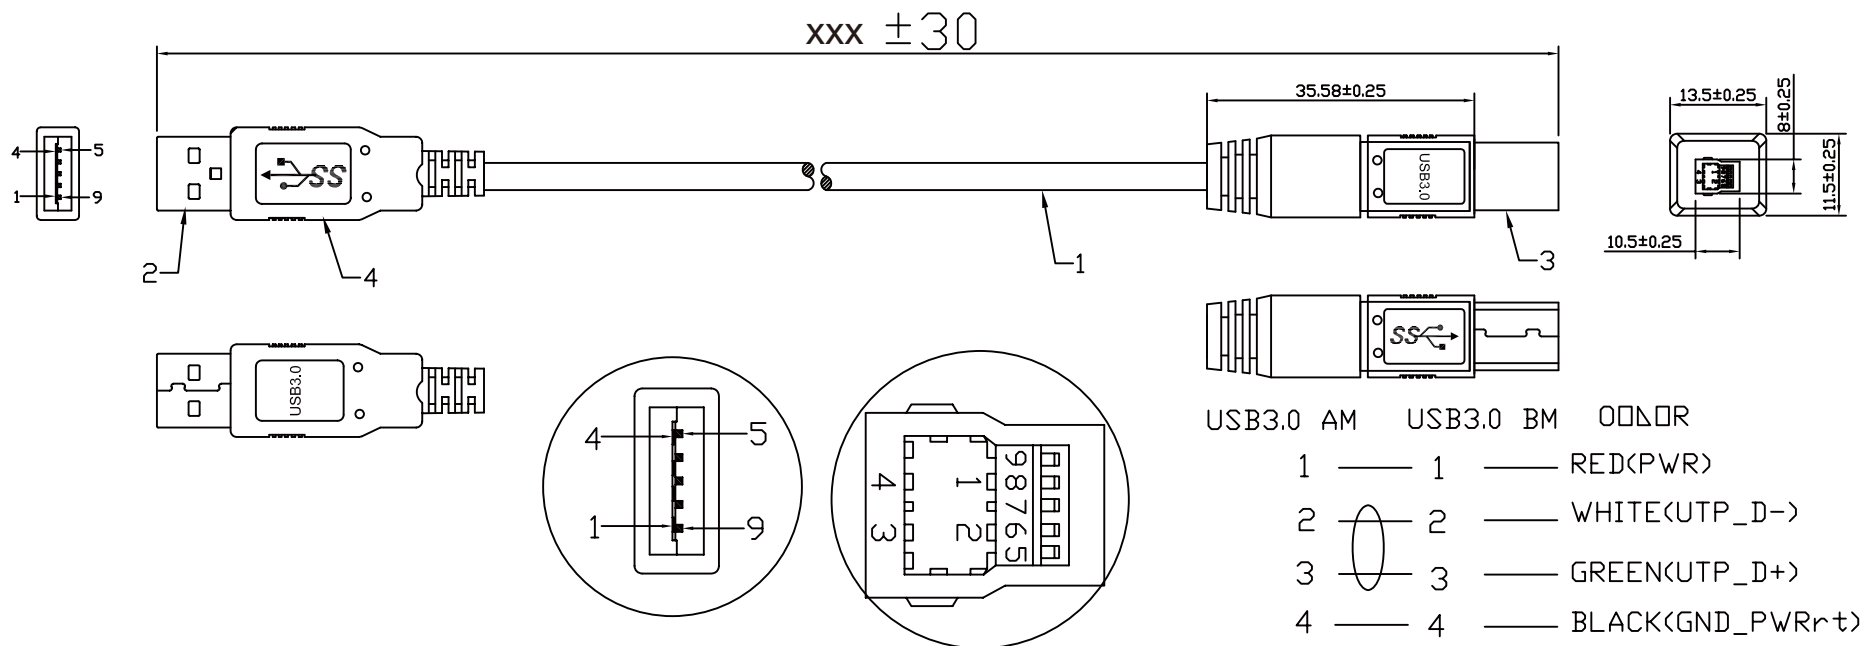

ELECTRICAL PROPERTIES:

- 100% OPEN SHORT MIS-WIRE TEST
- Contact Resistance:10ohm
- Insulation Resistance:5Mega ohm
- Hipot test:DC 300V/10ms

USB3.0

4	55P PVC MOLD BLUE IN COLOR	1	pcs
3	USB3.0 B TYPE MALE SHELL PLATED:NICKEL CONTACT:G/F	1	pcs
2	USB3.0 A TYPE MALE SHELL PLATED:NICKEL CONTACT:G/F	1	pcs
1	UL20276 (1P*28#+D+AL+Myair)*2C+1P*28#+2C*28#+AL+B DD:5.5±0.15mm BLUE IN COLOR	1	pcs
DESCRIPTION		Q'TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

UBX2-9A9B28-Mxxx-LF

SERIES

LEADFREE

1M:1MTR
2M:2MTR
3M:3MTR

9 PIN A TYPE TO 9 PIN B TYPE

MALE TO MALE
28 AWG

DESCRIPTION: