




P2



Quality Requirement
 Continuity: 1Ω
 Insulation resistance: 10MΩ
 Withstand Voltage: 0.05See DC300V

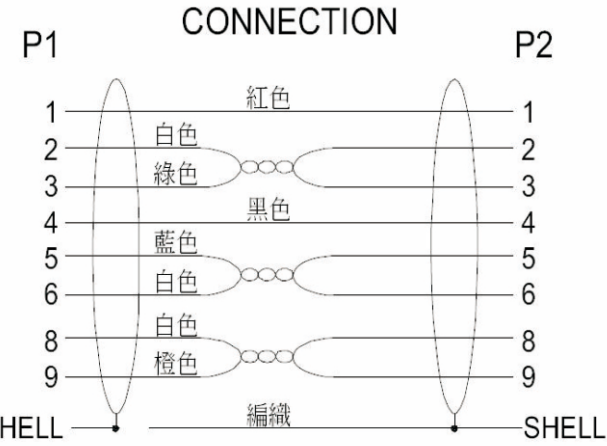

45° BENDING
 90° BENDING
 180° BENDING

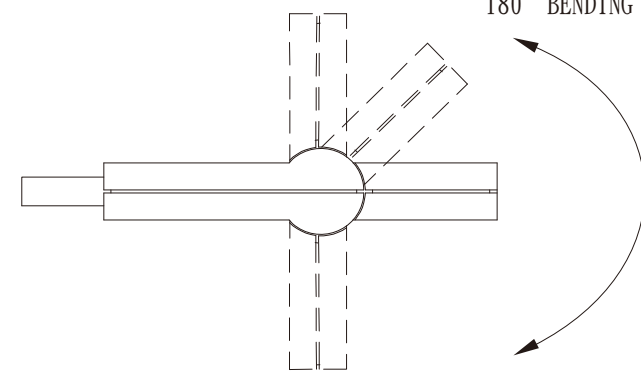

ROTATE ANGLE STATIONS

Item	Name & Description	QT' Y
1	USB3.0[(30AWG*1P+EAM)*2+(30AWG*4C+AE)]*1F OD:2.5*6.0mm BALCK PVC JACKTE	1 PCS
2	USB A TYPE MALE 9PIN BLUE INSULATION TERMINAL PLATED GOLD 30u"	1 PCS
	SHELL PLATED IN SOLDER TYPE USB3.0	
3	USB A TYPE FEMALE 9PIN BLUE INSULATION TERMINAL PLATED GOLD 30u"	1 PCS
	SHELL PLATED IN SOLDER TYPE USB 3.0	
4	USB A TYPE FEMALE BLACK ABS TOP AND BOTTOM PLASTIC ASEMBLY	1 SET
5	USB A TYPE MALE BLACK ABS TOP AND BOTTOM PLASTIC ASEMBLY	1 SET
6	AN ELASTIC BAND WITH TRANSPARENT SILICONE RUBBER COMPOUND GEL	1 SET

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

UBX2-EMRT-9A9A-LF
 SERIES | LEADFREE
 9 PIN TO 9 PIN A TYPE
 ROTARY
 MOLDING
 MALE TO FEMALE

DESCRIPTION: