


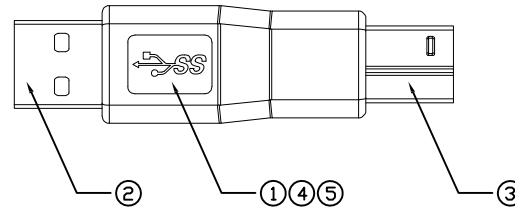


CONN#1



CONN#2

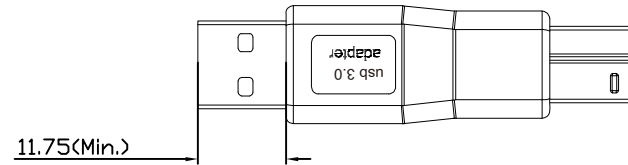

PIN ASSIGNMENT:

CONN.#1

CONN.#2

1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
9	_____	9

SHELL _____

SHELL _____

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE:20M Ohms(Min)
4. CONDUCTIVE RESISTANCE:1.0 Ohms(Max)

5	OVERMOLD	5.5g	PVC 45P BLUE UL94V-0
4	INNERMOLD	2.6g	PE LOW DENSITY
3	CONN#2.	1	USB 3.0 BM 短體端子鍍金15U"
2	CONN#1.	1	USB 3.0 AM 短體鍍金15U"
1	CABLE	9	電子線 #28 鍍錫銅 L=26mm
NO.	DESCRIPTION	QTY.	MATERIAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
.X ± 0.50
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

UBX2-MM-9A9B-LF
SERIES | LEADFREE
9 PIN A TYPE TO 9 PIN B TYPE
MOLDING
MALE TO MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CABLE ASSEMBLY, USB 3.0 A(M) TO USB 3.0 BM