
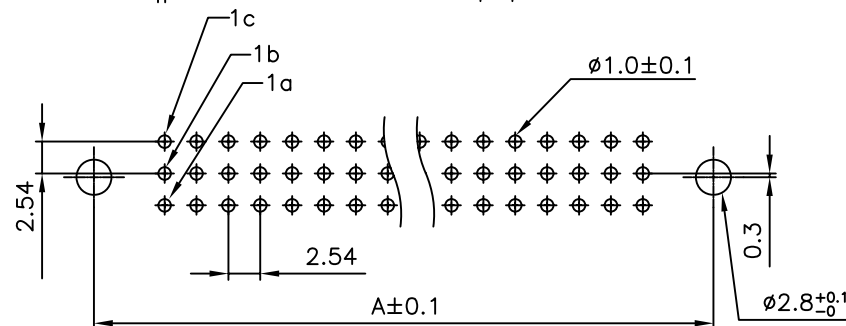

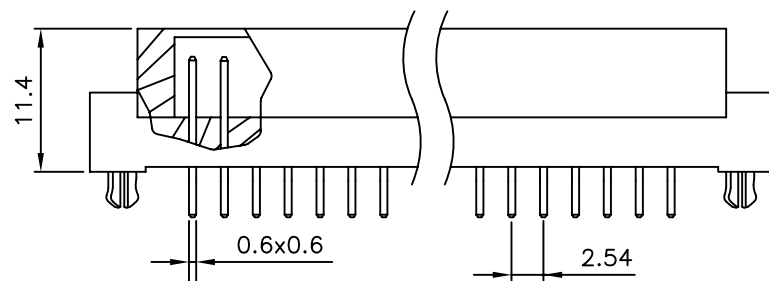


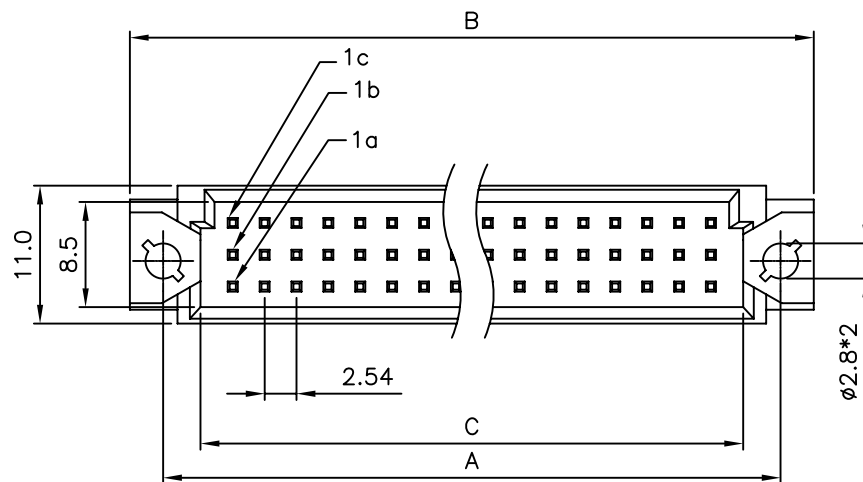

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0 (standard)

Contacts: Brass (Male) ; Phosphor Bronze (Female)

Rivet,Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact area: 1u"~30u" Selective gold

Solder tails area: 100u" Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C TO $+105^{\circ}\text{C}$

NOTE:

PART NO.	A	B	C
UC-PDZ-3X32	90.00	95	85.5
UC-PDZ-3X16	50.00	53.5	44.6



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

UC-PDZ-3Xxx-LF
SERIES
LEADFREE
3X16:48WAY
3X32:96WAY
CLIP
DIP 180°
MALE

DESCRIPTION: DIN 41612 (THREE ROW) MALE 96PIN & 48PIN