
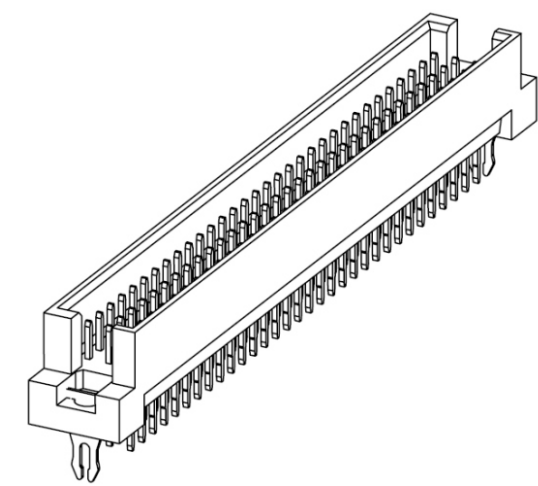

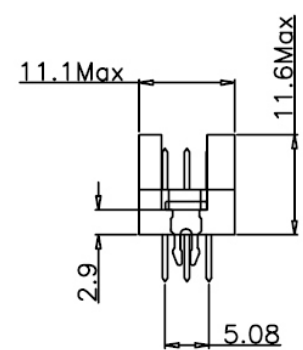
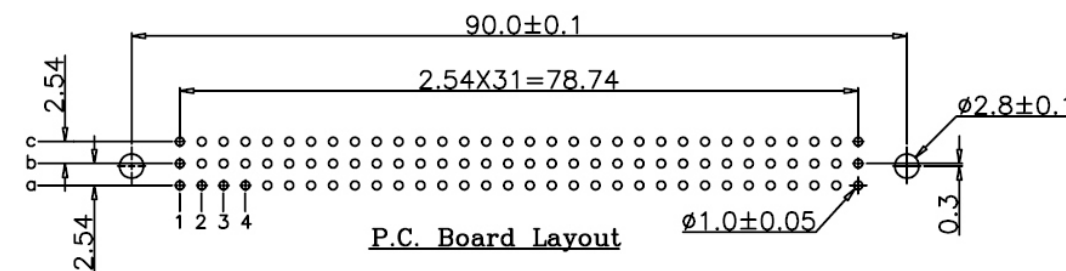
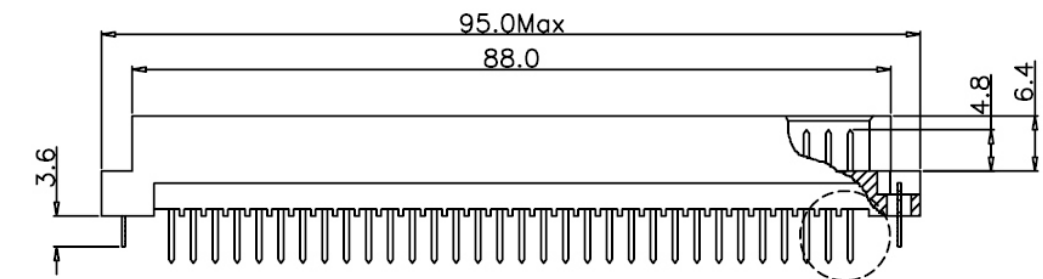


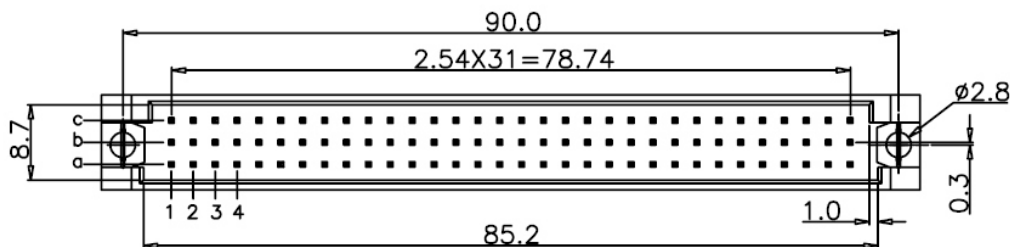

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X. ±
CHECKED BY GENIUS		.X ±
UNIT / mm		.XX ±
SCALE 1 : 1		.XXX ±
DATE		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

UB-PPZ-3X32-LF		
SERIES	CLIP	LEADFREE
	180° PRESS FIT	96 WAY
	MALE	

DESCRIPTION: